

SSD6202 Ubuntu server 20.04.2

Installation Guide

Version 1.00

Copyright © 2021 HighPoint Technologies, Inc.

All rights reserved.

Last updated on March 22, 2021

Table of Contents

1 Overview.....	1
2 Installing Ubuntu server 20.04.2 on SSD6202 controller	1
Step 1 Prepare Your Hardware for Installation	1
Step 2 Create an Array	1
Method 1: Create a RAID array via RAID Switch settings	1
Method 2: Create a RAID array using the Motherboard BIOS.....	2
Method 3: Create RAID in UEFI.....	5
Method 4: Create the RAID array using a Windows operating System, and the WebGUI management software:	7
Method 5: Create a RAID array in Ubuntu server 20.04.2 using the CLI Tool	7
Step 3 Adjust the Motherboard BIOS Settings	8
Step 4 Install Ubuntu server 20.04.2 to the SSD6202	9
Appendix	13
Troubleshooting	13
1. The CLI reports that “No NVMe Controller is found”.....	13
2. Check the RAID create via RAID Switch settings is created or not.....	13

1 Overview

This guide explains how to install Ubuntu server 20.04.2 to an NVMe SSD or array hosted by the SSD6202 controller.

For Ubuntu server 20.04.2

Mirror link:

<https://ubuntu.com/download/server>

2 Installing Ubuntu server 20.04.2 on SSD6202 controller

Step 1 Prepare Your Hardware for Installation

After installing the NVMe SSDs into the SSD6202 controller, you can configure the SSD's as a RAID array, or use them as separate, single disks.

Before installation, you must temporarily remove all the NVMe SSD, which are not physically attached to SSD6202 controller, from your system. These can be reinstalled after Ubuntu server 20.04.2 is up and running.

Note: Ubuntu server 20.04.2 requires UEFI Boot support when used with the SSD6202. If you have other SCSI-class adapters installed, you must make sure the SSD6202 controller UEFI support is loaded first; otherwise the system may be unable to boot. If the SSD6202 is not loading first, try moving it to another PCIe slot.

Step 2 Create an Array





If you would like to configure a RAID array using NVMe SSD's hosted by the SSD6202, please select 1 of the following 5 Methods.

Method 1: Create a RAID array via RAID Switch settings

1. Connect two NVMe SSD's to the SSD6202.

Note: Make sure that there is no RAID or residual partitions in the two NVMe SSD's.

2. Create RAID arrays via RAID Switch settings.


			
None	JBOD	RAID 1	RAID 0

Note: If you don't want to use RAID Switch to create RAID, please make sure the switch setting is None.


Method 2: Create a RAID array using the Motherboard BIOS

Using the SuperMicro H11DSi motherboard as an example:

1. Set 'Boot mode select' to 'UEFI'.

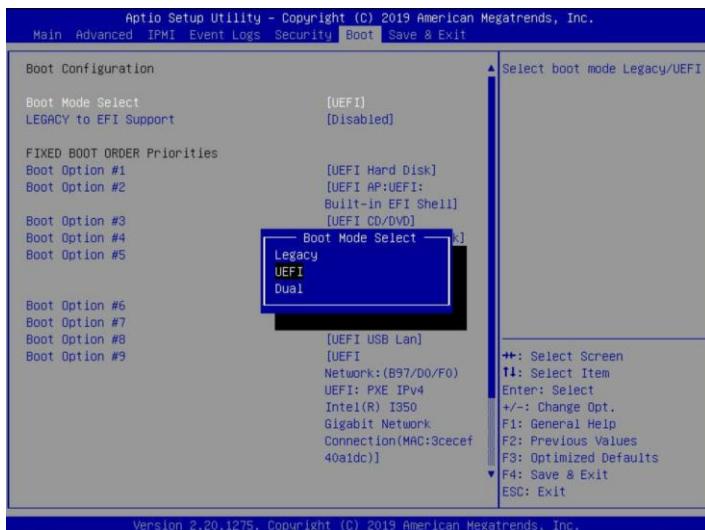


2. Next, under "Advanced->PCIe/PCI/PnP Configuration", change "CPU Slot x PCI-E OPROM" to "EFI". "x" refers to the slot number (slot 2 was used when the screenshot was taken). Please consult the motherboard manual for more information.

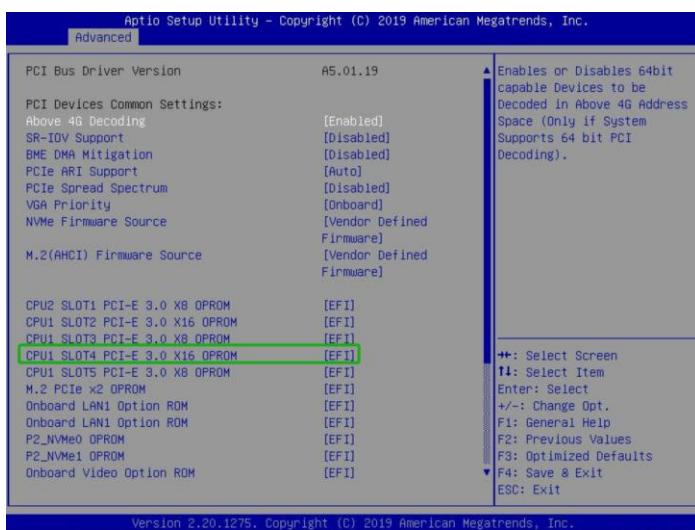


3. Creating the RAID array:

- a. Select "Advanced→Marvell NVMe Configuration Utility";

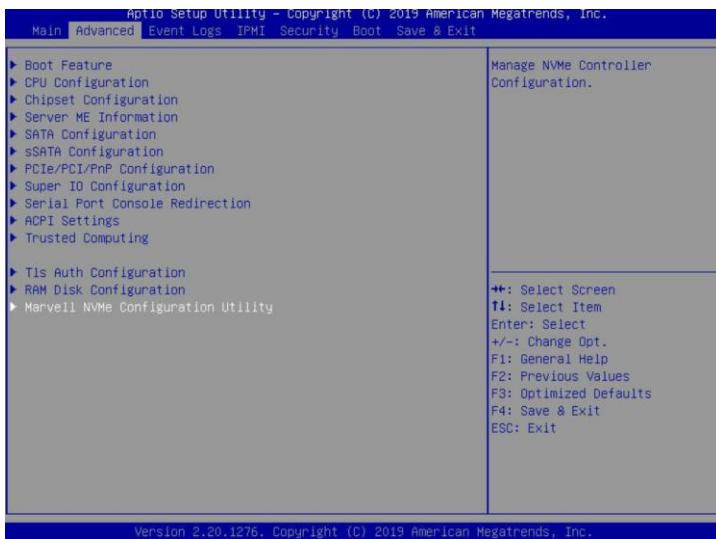


Note: If you cannot find “Marvell NVMe Configuration Utility” in the motherboard BIOS under “advanced” interface, you will need to create the array using one of the other four methods.


- Next, select “Create RAID Configuration”. Press“Enter”to open the Configuration Utility.

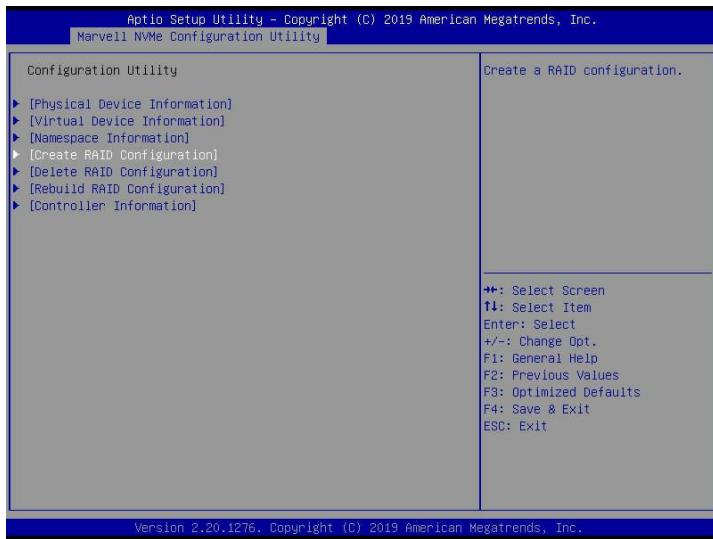


- Set “RAID Configuration Menu” to “Enabled”, and then select “Goto RAID Config”.

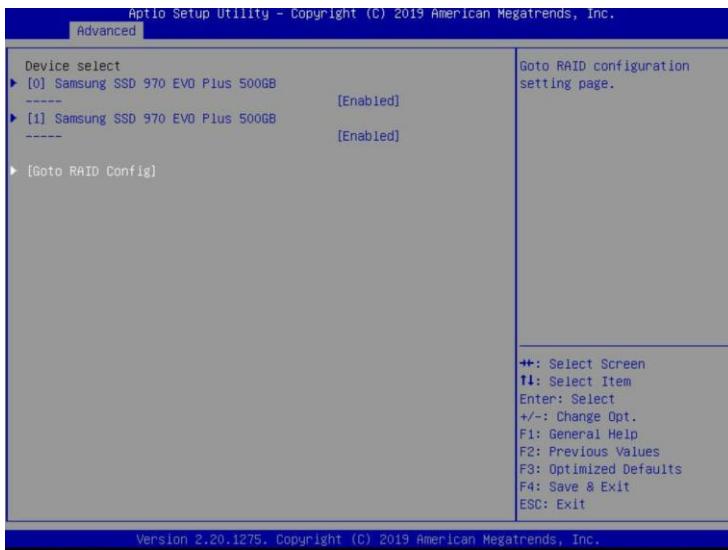

- d. For “Would you like to create this virtual disk? ” select “Yes”, then select “Goto Namespace Configuration”.

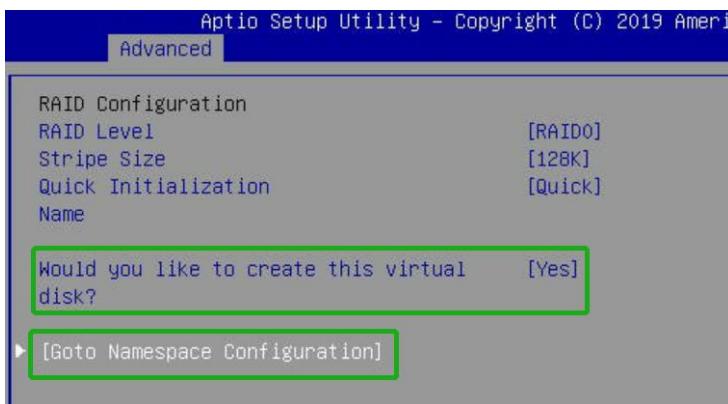

- e. For “Would you like to create those namespace on the virtual disk? ” select “Yes”, then select “Accept” to create the RAID0 array.

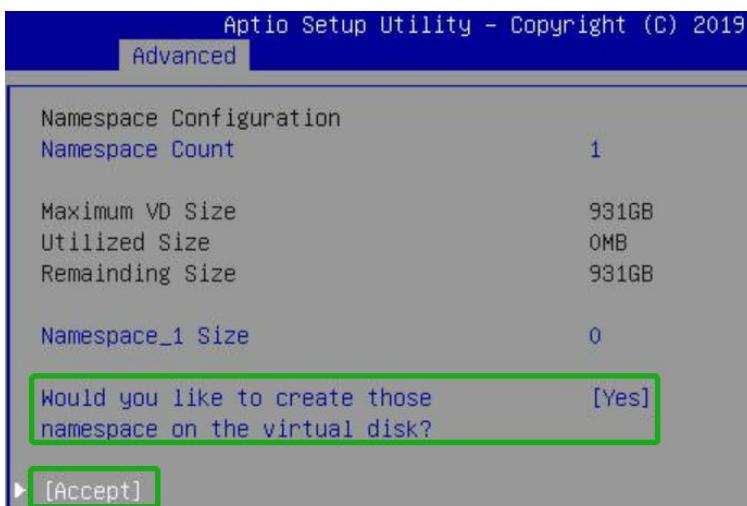

- f. When the page displays “Successful!” select OK, to exit the menu;




Method 3: Create RAID in UEFI


- First, prepare the UEFI Tool. This file should be copied to the root of a bootable USB flash drive.

Using the SuperMicro H11DSi motherboard as an example:

- Set 'Boot mode select' to 'UEFI';

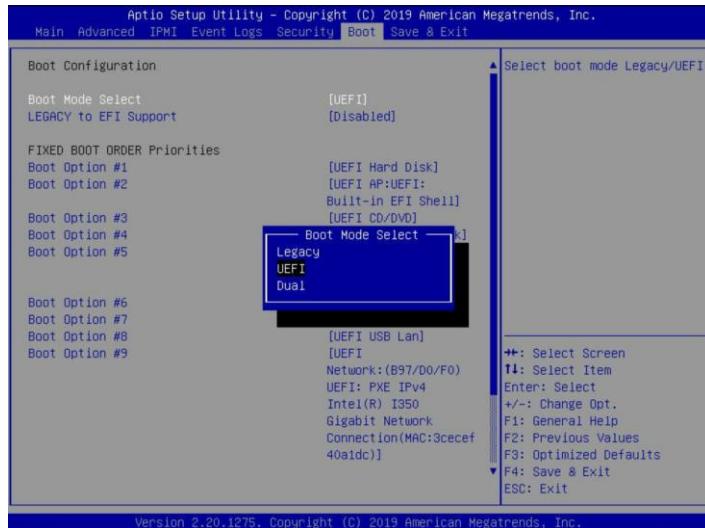

- Choose to boot from the USB flash drive (shown as "UEFI: SanDisk, Partition 1" for the example below):

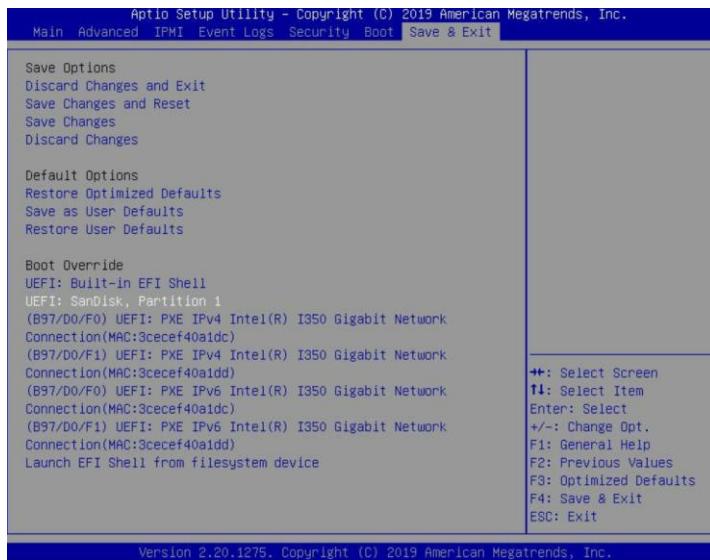

- After entering the UEFI Shell, select "FS0:" to access the USB flash drive.

Note: "FS0" is the name of the USB flash drive used for this example

```
UEFI Interactive Shell v2.2
EDK II
UEFI v2.70 (American Megatrends, 0x0005000E)
Mapping table
  FS0: Alias(s):HD0q0b;;BLK1:
    PciRoot(0x0)/Pci(0x14,0x0)/USB(0x10,0x0)/HD(1,MBR,0x48D2E0C7,0x3F,0x72
  9BFC1)
  BLK0: Alias(s):
    PciRoot(0x0)/Pci(0x14,0x0)/USB(0x10,0x0)
Press ESC in 4 seconds to skip startup.nsh or any other key to continue.
Shell> FS0:
```

- Next, locate the “mnv_cli.efi” program and run it:

```
SUPERVISOR>
FS0:> cd uefi\64
FS0:\uefi\64> mnv_cli.efi
CLI version: 1.0.0.1041
Welcome to NVMe Command Line Interface.
```

Note: if the CLI reports that “No NVMe Controller is found”, please see Appendix – Troubleshooting.

- To create a RAID0 array using two NVMe SSD’s, enter the following command:

create -r 0 -d 0,1

```
> create -r 0 -d 0,1
Create virtual disk successfully.
> -
```

For more CLI commands, please download the CLI manual from the product page of the official website.

Method 4: Create the RAID array using a Windows operating System, and the WebGUI management software:

1. This method assumes you have access to a Windows Server 2019 system and have installed the WebGUI software.
2. Open the WebGUI, select the Logical tab. Click “Create Array”, and configure the array as desired using the drop-down menus and selection boxes. Once configured, click the “Create”button to create the array (the example below shows 2 NVMe SSD’s configured as a RAID 0 array).

Available Disks:	Location	Model	Capacity	Max Free
1/1	Samsung SSD 970 EVO Plus 500GB	500.10 GB	500.10 GB	
1/2	Samsung SSD 970 EVO Plus 500GB	500.10 GB	500.10 GB	

3. Once the array has been created, it will be displayed under **Logical Device Information**.

Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
VD_0	RAID 0	1.00 TB	128k	512B	HighPoint SSD6202	Normal Maintenance

Location	Model	Capacity	Max Free
1/1	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB
1/2	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB

Method 5: Create a RAID array in Ubuntu server 20.04.2 using the CLI Tool

1. This method assumes that you have already prepared a Ubuntu server 20.04.2 system.
2. Boot the system, and enter the username and password to start Ubuntu.
3. Copy the CLI package into the root directory of a USB flash drive. Use the following command to copy the mnv_cli package to home directory:

```
cp mnv_cli /home
```

```
[root@localhost 64]# ls
mnv_cli
[root@localhost 64]# cp mnv_cli /home/
```

- Access the home directory and enter the following command to start the CLI:

```
./mnv_cli
```

```
[root@localhost 64]# cd /home/
[root@localhost home]# ./mnv_cli
CLI Version: 1.0.0.1041
Welcome to NVMe Command Line Interface.

> _
```

- To create a RAID0 array using two NVMe SSD's, enter the following command.

```
create -r 0 -d 0,1
```


```
> create -r 0 -d 0,1
Create virtual disk successfully.
> _
```

For more CLI commands, please download the CLI manual from the product page of the official website.

Step 3 Adjust the Motherboard BIOS Settings


Using the Super Micro H11DSi motherboard as an example:

- In the system BIOS SETUP menu, change ‘Boot mode select’ to ‘UEFI’;

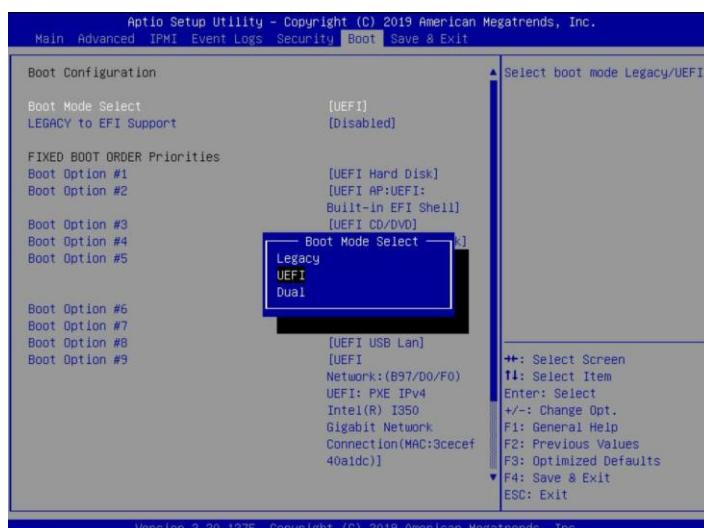

- Under "Advanced→PCIe/PCI/PnP Configuration, change the setting for “CPU Slot x

PCI-E OPROM" to "**EFI**". "x" refers to the slot number (slot 4 was used when the screenshot was taken). Please consult the motherboard manual for more information.

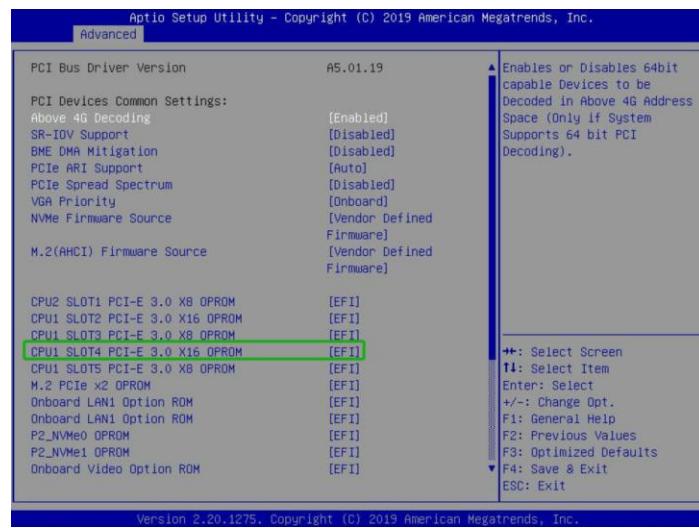


3. Set "Secure Boot" to "Disabled".




Step 4 Install Ubuntu server 20.04.2 to the SSD6202


1. Booting from the Ubuntu server 20.04.2 Installation DVD disc (UEFI mode).
2. When the Installation screen appears:
 - a. please select "**Install**" to install Ubuntu server 20.04.2.

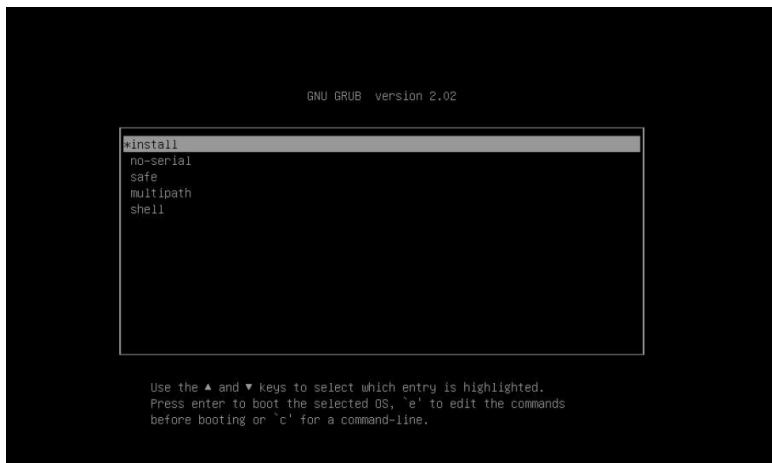


3. When the installation switches to the graphical interface, press "**Enter**".

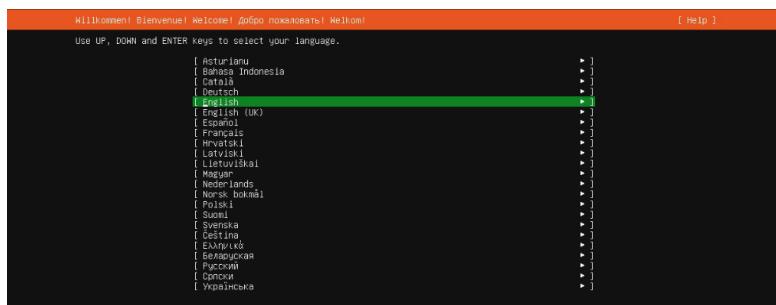


4. When prompted, choose "**Done**" to continue. Follow the prompts to continue the installation.

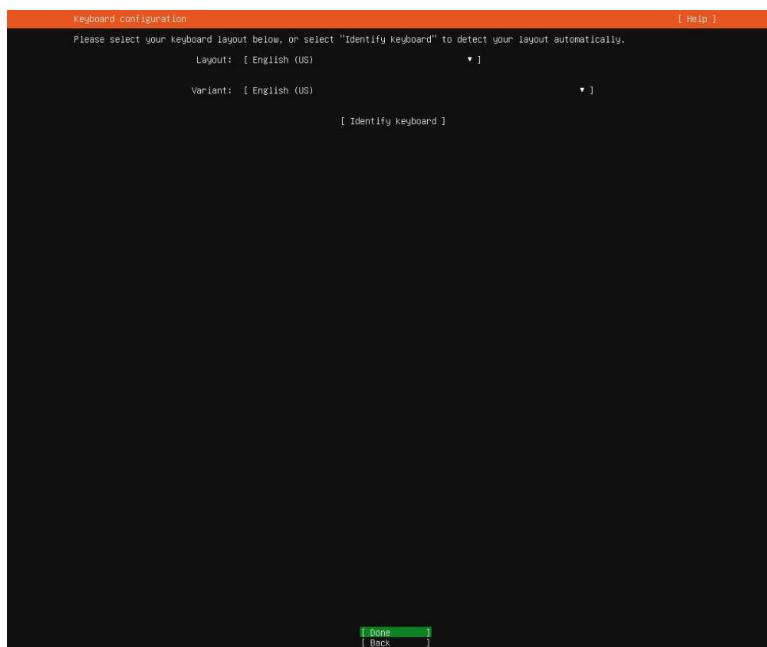

5. During installation, you will be asked to select the target disk. Select the RAID array as the target disk to install the Ubuntu server 20.04.2. You can then proceed normally - follow the onscreen prompts to install Ubuntu server 20.04.2 to the array.

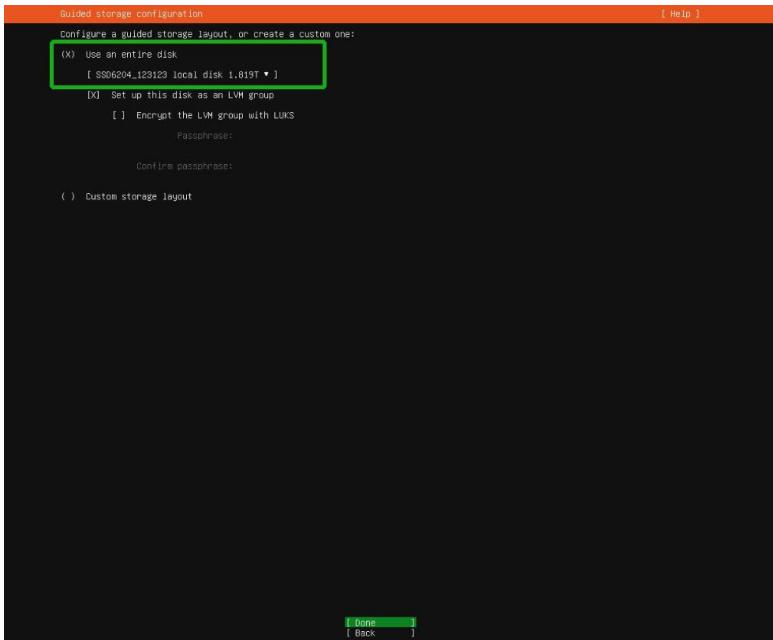

6. After installation is complete, select the appropriate startup item to enter the system.

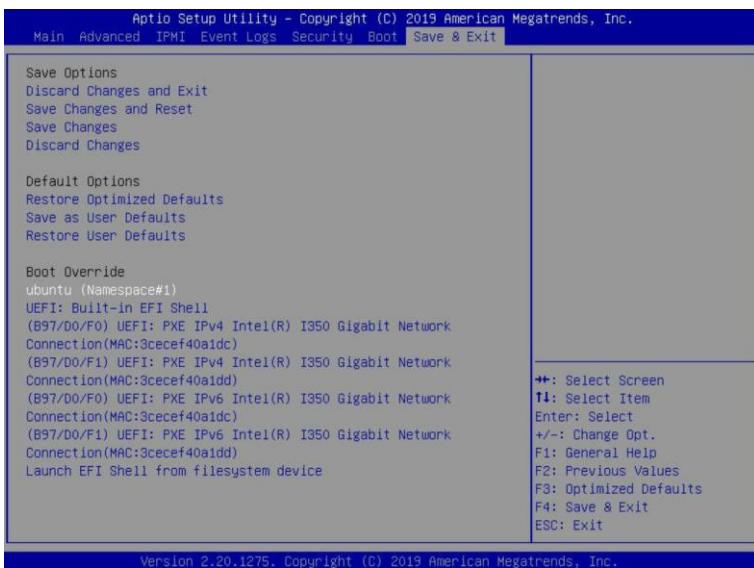

7. Enter the user name and password to log into Ubuntu server 20.04.2.

```
test login: test
Password:
Welcome to Ubuntu 20.04.2 LTS (GNU/Linux 5.4.0-65-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

System information as of Fri 26 Feb 2021 09:19:51 AM UTC

System load: 0.03      Memory usage: 3%   Processes: 727
Usage of /: 5.1% of 195.86GB Swap usage: 0%   Users logged in: 0

0 updates can be installed immediately.
0 of these updates are security updates.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

test@test:~$
```

Appendix

Troubleshooting

1. The CLI reports that “No NVMe Controller is found”

- 1) After starting “mnv-cli.efi”, the utility reports “**No NVME Controller is found**” (as shown below):

The screenshot shows a terminal window with the following text:
Management CLI\1.0.0.1041_sign\uefi\64\> mnv_cli.efi
No NVMe Controller is found.
CLI Version: 1.0.0.1041
Welcome to NVMe Command Line Interface.

- 2) You will need check and make sure the system recognizes the SSD6202. First, enter the following command using the UEFI tool:

```
pci -b
```

The screenshot shows a terminal window with the following text:
FS0:\> pci -b
FS0:\>

- 3) If the interface reports “**Vendor 1B4B Device 2241 Prog Interface 2**”, the SSD6202 is recognized by the motherboard, but cannot support the UEFI tool. In this case, you will need to create the array using one of the other methods described in this manual (BIOS, CLI or WebGUI).


The screenshot shows a terminal window with the following text:
00 08 00 00 ==> Mass Storage Controller - Non-volatile memory subsystem
em
Vendor 1B4B Device 2241 Prog Interface 2
FS0:\> FS0:\>

- 4) If the interface does not display “**Vendor 1B4B Device 2241 Prog Interface 2**”, then the motherboard does not recognize the SSD6202.
 - a. Power down the system, and make sure the SSD6202 is securely installed into the PCIe slot
 - b. Boot the system and enter the motherboard BIOS utility. Make sure the required BIOS settings are still enabled (refer to page 1)

2. Check the RAID create via RAID Switch settings is created or not

Method 1: Check in BIOS Utility


- 1) Set the Slot Storage OPROM of SSD6202 in the motherboard BIOS to UEFI.
- 2) Set ‘Boot mode select’ to ‘UEFI’.
- 3) From the motherboard BIOS menu, select “**Marvell NVME Configuration Utility**”:

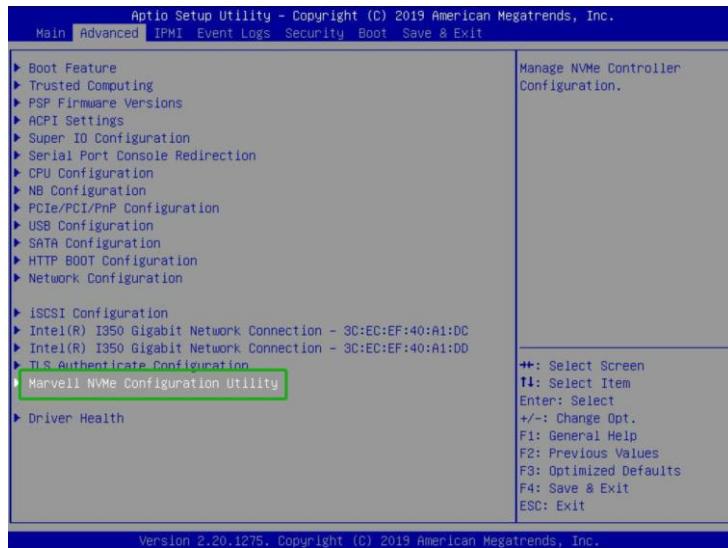

4) Select the “Virtual device information”



5) Select the “[0] New_VD”:

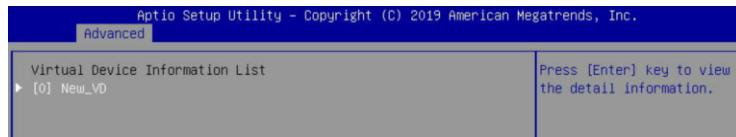


6) As shown in the figure below, you can see the RAID0 information.

Detail Information	
ID	0
Name	New_VD
Status	Functional
BGA Type	NONE
BGA Status	NONE
RAID Level	RAID0
Member Count	2
Member ID	[0] [1]
Stripe Block	128K
Size	931GB

Method 2: check in UEFI

- Choose to boot from the USB flash drive (shown as “UEFI: SanDisk, Partition 1” for the example below):

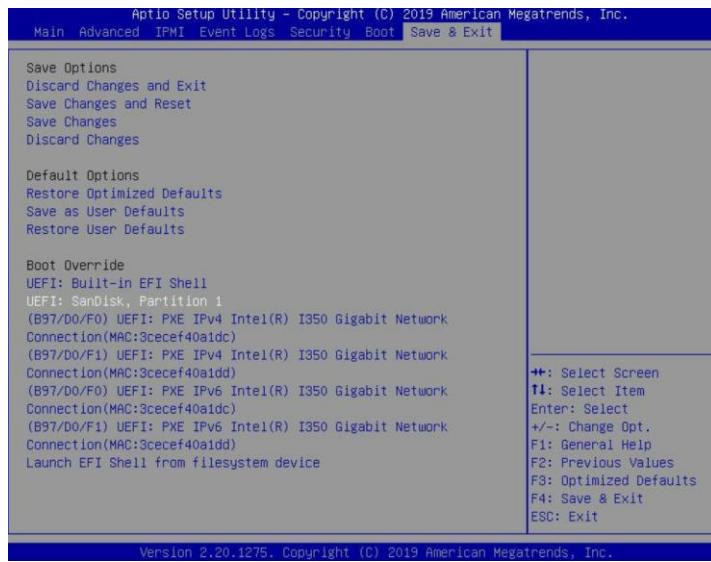

2. Next, locate the “mnv_cli.efi” program and run it:

```
SDORTC_FSO2
FSO:\> cd uefi\64
FSO:\uefi\64\> mnv_cli.efi
CLI version: 1.0.0.1041
Welcome to NVMe Command Line Interface.
```

3. you can recognized the RAID0 by entering the following command:

info -o vd

```
> info -o vd

VD ID: 0
Name: New_VD
Status: Functional
Importable: No
RAID Mode: RAID0
size: 931 GB
PD Count: 2
PDs: 0 1
Stripe Block Size: 128K
Sector Size: 512 bytes

Total # of VD: 1
```

Method 3: check in a windows operating System

1. This method assumes you have access to a Windows Server 2019 system and have installed the WebGUI software.
2. Open the WebGUI software, it will be displayed under **Logical Device Information**.

The screenshot shows the management interface for the HighPoint SSD6202. The top navigation bar includes Global View, Physical, Logical (selected), Setting, Event, and SHI. Under Logical, there are options for Create Array, Logical Device (selected), and Rescan. The main area displays two tables: Logical Device Information and Physical Device Information.

Logical Device Information:

Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
VD_0	RAID 0	1.00 TB	128K	512B	HighPoint SSD6202	Normal Maintenance

Physical Device Information:

Location	Model	Capacity	Max Free
1/1	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB
1/2	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB

Method 4: check in a CLI

1. This method assumes that you have already prepared a Ubuntu system.
2. Refer to “**Step 2 Create an array→Method 5**” to install CLI tool in the system.
3. Run CLI by the following command:

```
./mnv_cli
```

```
[root@localhost home]# ./mnv_cli
CLI Version: 1.0.0.1041
Welcome to NVMe Command Line Interface.
```

4. you can recognized the RAID0 by entering the following command:

```
info -o vd
```

```
> info -o vd

VD ID: 0
Name: New_VD
Status: Functional
Importable: No
RAID Mode: RAID0
size: 931 GB
PD Count: 2
PDs: 0 1
Stripe Block Size: 128K
Sector Size: 512 bytes

Total # of VD: 1
```