



SSD7000 RAID Management Guide

Version 1.01

Copyright © 2020 HighPoint Technologies, Inc.
All rights reserved

Table of Contents

SSD7000 RAID Management Guide.....	1
HighPoint RAID Management Software.....	4
Using the HighPoint RAID Management (WebGUI) Software.....	5
Starting the WebGUI	5
How to login WebGUI in Windows/Mac.....	5
How to login WebGUI in Linux.....	6
Verify the Controller Status.....	7
Creating an Array	9
Single controller to create an array	9
Using the Cross-Sync feature to create an array	11
Adding Spare Disks	17
Obtaining Logical Device Information	18
Array Information & Maintenance Options: Normal Status	19
Array Information & Maintenance Options: Critical Status	20
Array Information & Maintenance Options: Disabled Status.....	21
Physical Device Information	22
System Setting	23
System Setting.....	24
Password Settings	25
Email Setting	25
Email Precautions.....	26
Event Tab	29
SHI (Storage Health Inspector)	29
How to Enable SMART Monitoring.....	30
How to Use the Health Inspector Scheduler	32
How to Create a New Verify Task.....	33
Using the HighPoint Command Line Interface (CLI)	34
How to use the CLI in Windows	34
How to use the CLI in a Linux system	34
CLI Command Reference	35
Query Commands.....	35
query controllers	35
query enclosures.....	36
query devices.....	38
query devices {device_id}	40
query arrays.....	40
query arrays {arrays_id}.....	41
Init Commands	42
init {device_id}	42
init {array_id} {start stop}	43
Create Commands.....	43
Delete Command	46
Unplug Command	47
Rebuild Commands	48
rebuild {array_id} {device_id}	48
rebuild {array_id} {start stop}	49
Verify Command	49
Rescan Command.....	50
Lscard Command.....	50
Events Commands.....	51
events	51
events clear.....	51

events save {file_name}.....	52
Mail Commands	52
mail recipient.....	53
mail recipient add {recipient_name} {mail_address} [Inf War Err].....	53
mail recipient delete {recipient_name}.....	54
mail recipient test {recipient_name}.....	54
mail recipient set {recipient_name} [Inf War Err].....	54
mail server	55
mail server set {server_address} {port} {ssl} {status} {from_address} [username]	
[password]	55
mail server set {a p s m u t} {value}.....	56
Task Commands	58
task	58
task rebuild {array_id}{name=}{once daily weekly monthly={day} interval={interval}	
start=mm/dd/yyyy end=mm/dd/yyyy time=hh:mm:ss	59
task verify	60
task delete {task_id}	60
task enable {task_id}.....	61
task disable {task_id}	61
Set Commands	62
set	62
Help Commands	65
help	65
help {command}	65
Exit Command	66
Clear Commands	66
Troubleshooting.....	66
Table 1.WebGUI Icon Guide.....	67
Table 2. RAID Level Reference Guide	69
HighPoint Recommended List of NVMe SSDs and Motherboards.....	70
Contacting Technical Support.....	71

HighPoint RAID Management Software

Your Choice – Graphical or Text-only interfaces

HighPoint understands that one size doesn't fit all - when it comes to maintaining critical storage configurations, each customer has specific needs and preferences. We have developed both graphical and text-based management interfaces for the SSD7101A-1 / 7103 / 7120 / 7202 / 7204 / 7104 / 6540 / 6540M / 7184 / 7180 / 7505 / 7105 NVMe RAID Controllers. To simplify installation and upgrade procedures both interfaces are packaged into a single download, and are available for each operating system platform.

Both management interfaces share universal layouts across all major operating systems, and can be administered locally or remotely via an internet connection. – if you are comfortable with the Windows release, you will have no problem managing NVMe RAID configurations installed for a Linux distribution.

The Web RAID Management Interface (**WebGUI**), is a simple, and intuitive web-based management tool available for Windows and Linux operating systems. It is an ideal interface for customers unfamiliar with RAID technology. The Wizard-like Quick Configuration menu allows even the most novice user to get everything up and running with a few simple clicks. Experienced users can fine tune configurations for specific applications using the Advanced Options menu.

The **CLI** (command line interface) is a powerful, text-only management interface designed for advanced users and professional administrators. The universal command lines work with any platform, and are shared across our entire product line. Comprehensive user guides are available for the CLI, and are included with the most recent product updates available from the SSD7101A-1 / 7120 / 7103 / 7202 / 7204 / 6540 / 6540M / 7184 / 7104 / 7505 / 7105 Software Updates webpage.

Using the HighPoint RAID Management (WebGUI) Software

This guide provides an overview of the Web-RAID Management graphical user interface, also known as the WebGUI. The WebGUI is an intuitive, yet comprehensive management tool designed for users of any experience level.

Starting the WebGUI

How to login WebGUI in Windows/Mac

Double click the Desktop ICON to start the software using the system's default web browser. It will automatically log-in to the WebGUI.




The password can be set after the first log-in. To change the password, select **Setting>Security** from the menu bar (see page 20 for more information).

Global View	Physical	Logical	Setting	Event	SHI	Help
System Setting						
Enable auto rebuild. <input type="text" value="Enabled"/>						
Enable Continue Rebuilding on error. <input type="text" value="Enabled"/>						
Restrict to localhost access. <input type="text" value="Enabled"/>						
Set Rebuild Priority: <input type="text" value="Medium"/>						
Port Number: <input type="text" value="7402"/>						
<input type="button" value="Submit"/>						
Password Setting						
Password: <input type="text"/>						
Confirm: <input type="text"/>						
<input type="button" value="Submit"/>						

How to login WebGUI in Linux

Enter <http://127.0.0.1:7402> into the **browser** to log into the **WebGUI**, 7402 is the WebGUI's Port Number, which can be modified.

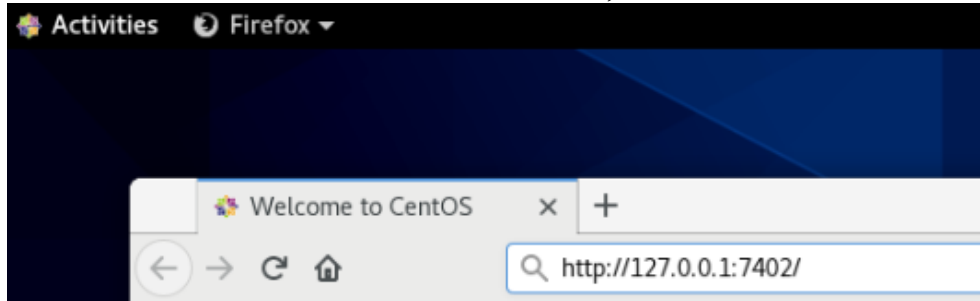

The password can be set after the first log-in. To change the password, select **Setting>Security** from the menu bar (see page 20 for more information).


A screenshot of the WebGUI 'System Setting' page. The page has a top navigation bar with tabs: 'Global View', 'Physical', 'Logical', 'Setting' (selected), 'Event', 'SHI', and 'Help'. On the left, there is a sidebar with 'System' and 'Email' links. The main content area is divided into two sections: 'System Setting' and 'Password Setting'. The 'System Setting' section includes four rows of settings: 'Enable auto rebuild.' (Enabled), 'Enable Continue Rebuilding on error.' (Enabled), 'Restrict to localhost access.' (Enabled), and 'Set Rebuild Priority:' (Medium). Below these is a 'Port Number:' field with the value '7402' and a 'Submit' button. The 'Password Setting' section includes 'Password:' and 'Confirm:' fields, each with a text input box, and a 'Submit' button.

Verify the Controller Status

- a) The **Global View** Tab will display the overall status of the controller.
- b) RAID configurations are listed under **Logical Device Information**.
- c) The individual M.2 SSDs are listed under **Physical Device Information**.

SSD7202:

Controller(1): NVMe



Global View Physical Logical Setting Event SHI Help

HBA Properties

Host Adapter model: [HighPoint NVMe RAID Controller](#)

Controller count: 1


Enclosure count: 1

Physical Drive: 2

Legacy Disk: 2

RAID Count: 0

Storage Properties



Total Capacity: 1024 GB

Configured Capacity: 1024 GB


Free Capacity: 0 GB

Configured 100.0%

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

SSD7101A/7120/7103/7204/7104/6540/6540M/7505/7105:

Controller(1): NVMe



Global View Physical Logical Setting Event SHI Help

HBA Properties

Host Adapter model: [HighPoint NVMe RAID Controller](#)

Controller count: 1


Enclosure count: 1

Physical Drive: 4

Legacy Disk: 4

RAID Count: 0

Storage Properties



Total Capacity: 2000 GB

Configured Capacity: 2000 GB

Free Capacity: 0 GB

Configured 100.0%

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

SSD7184/7180:

Controller(1): NVMe ▾



Global View Physical Logical Setting Event SHI Help

HBA Properties

Host Adapter model: HighPoint NVMe RAID Controller

Controller count: 1


Enclosure count: 1

Physical Drive: 8

Legacy Disk: 8

RAID Count: 0

Storage Properties



Total Capacity: 14302 GB

Configured Capacity: 14302 GB

Free Capacity: 0 GB

Configured 100.0%

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

Creating an Array

Single controller to create an array

1. Open the WebGUI
2. Select the proper **controller** from the drop down on the top left
3. Click the **Logical** tab
4. Click **Create Array**

SSD7202:

Controller(1): NVMe

HighPoint Technologies, Inc.

Global View Physical **Logical** Setting Event SHI Help

Create Array

Spare Pool
Logical Device
Rescan

Array Type: RAID 0
Array Name: Default
Initialization Method: Keep Old Data
Cache Policy:
Block Size: 512K

Select All

Location	Model	Capacity	Max Free
1/E1/1	WDS100T3X0C-00S3G0	1.00 TB	1.00 TB
1/E1/2	WDS100T3X0C-00S3G0	1.00 TB	1.00 TB

Available Disks:

Capacity: (According to the max free space on the selected disks) Maximum (MB)

Create

SSD7101A/7103/7204/7104/6540M/7505/7105:

Controller(1): NVMe

HighPoint Technologies, Inc.

Global View Physical **Logical** Setting Event SHI Help

Create Array

Spare Pool
Logical Device
Rescan

Array Type: RAID 0
Array Name: Default
Initialization Method: Keep Old Data
Cache Policy:
Block Size: 512K

Select All

Location	Model	Capacity	Max Free
1/E1/1	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB
1/E1/2	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB
1/E1/3	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB
1/E1/4	Samsung SSD 970 EVO Plus 500GB	500.10 GB	0.00 GB

Available Disks:

Capacity: (According to the max free space on the selected disks) Maximum (MB)

Create

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

SSD7184/7180:

Controller(1): NVMe ▾



Global View

Physical

Logical

Setting

Event

SHI

Help

Create Array

Spare Pool

Logical Device

Rescan

Create Array

Array Type: RAID 0 ▾

Array Name: Default

Initialization Method: Keep Old Data ▾

Cache Policy: ▾

Block Size: 512K ▾

Select All

	Location	Model	Capacity	Max Free
<input type="checkbox"/>	1/E1/1	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E1/2	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E1/3	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E1/4	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E1/5	WUS4CB032D7P3E3	3.20 TB	0.00 GB
<input type="checkbox"/>	1/E1/6	WUS4CB032D7P3E3	3.20 TB	0.00 GB
<input type="checkbox"/>	1/E1/7	WUS4CB032D7P3E3	3.20 TB	0.00 GB
<input type="checkbox"/>	1/E1/8	WUS4CB032D7P3E3	3.20 TB	0.00 GB

Available Disks:

Capacity:
(According to the
max free space on
the selected disks)

Maximum (MB)

Sector Size: 512B ▾

Create

Using the Cross-Sync feature to create an array

Note: This function is only supported by SSD7101A-1, SSD7120, SSD7202 controllers

For more information about Cross-Sync, please submit a Support Ticket via our [Online Support Portal](#), or contact sales@highpoint-tech.com

1. Open the WebGUI
2. Select the appropriate controller using the drop-down menu found in the upper left-hand corner of the interface
3. Click the Logical tab
4. Click Create Array – it should recognize the SSD's attached to both cards.

SD7101A-1:

Controller(1): NVMe

HighPoint Technologies, Inc.

Global View Physical **Logical** Setting Event SHI Help

Create Array
Spare Pool
Logical Device
Rescan

Logical Device Information						
Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
Device_1_E1_1	Hard Disk	1.02 TB			HPT DISK 0_0	Legacy
Device_1_E1_2	Hard Disk	1.02 TB			HPT DISK 0_1	Legacy
Device_1_E1_3	Hard Disk	512.11 GB			HPT DISK 0_2	Legacy
Device_1_E1_4	Hard Disk	512.11 GB			HPT DISK 0_3	Legacy
Device_1_E2_1	Hard Disk	512.11 GB			HPT DISK 0_4	Legacy
Device_1_E2_2	Hard Disk	512.11 GB			HPT DISK 0_5	Legacy
Device_1_E2_3	Hard Disk	512.11 GB			HPT DISK 0_6	Legacy
Device_1_E2_4	Hard Disk	512.11 GB			HPT DISK 0_7	Legacy

Physical Device Information			
Location	Model	Capacity	Max Free
1/E1/1	Samsung SSD 970 PRO 1TB	1.02 TB	0.00 GB
1/E1/2	Samsung SSD 970 PRO 1TB	1.02 TB	0.00 GB
1/E1/3	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
1/E1/4	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
1/E2/1	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
1/E2/2	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
1/E2/3	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
1/E2/4	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

Global View
Physical
Logical
Setting
Event
SHI
Help

Create Array
Spare Pool
Logical Device
Rescan

Create Array

Array Type: RAID 0
Array Name: Default
Initialization Method: Quick Init
Cache Policy:
Block Size: 512K

Select All

	Location	Model	Capacity	Max Free
<input checked="" type="checkbox"/>	1/E1/1	Samsung SSD 970 PRO 1TB	1.02 TB	0.00 GB
<input checked="" type="checkbox"/>	1/E1/2	Samsung SSD 970 PRO 1TB	1.02 TB	0.00 GB
<input checked="" type="checkbox"/>	1/E1/3	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
<input checked="" type="checkbox"/>	1/E1/4	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
<input checked="" type="checkbox"/>	1/E2/1	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
<input checked="" type="checkbox"/>	1/E2/2	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
<input checked="" type="checkbox"/>	1/E2/3	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB
<input checked="" type="checkbox"/>	1/E2/4	Samsung SSD 970 PRO 512GB	512.11 GB	0.00 GB

Capacity: (According to the max free space on the selected disks)
Maximum (MB)

Create

SSD7120:

Controller(1): NVMe

Global View
Physical
Logical
Setting
Event
SHI
Help

Create Array
Spare Pool
Logical Device
Rescan

Logical Device Information

Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
Device_1_E1_1	Hard Disk	3.84 TB			HPT DISK 0_0	Legacy
Device_1_E1_2	Hard Disk	3.84 TB			HPT DISK 0_1	Legacy
Device_1_E1_3	Hard Disk	3.84 TB			HPT DISK 0_2	Legacy
Device_1_E1_4	Hard Disk	3.84 TB			HPT DISK 0_3	Legacy
Device_1_E2_1	Hard Disk	375.08 GB			HPT DISK 0_4	Legacy
Device_1_E2_2	Hard Disk	375.08 GB			HPT DISK 0_5	Legacy
Device_1_E2_3	Hard Disk	375.08 GB			HPT DISK 0_6	Legacy
Device_1_E2_4	Hard Disk	375.08 GB			HPT DISK 0_7	Legacy

Physical Device Information

Location	Model	Capacity	Max Free
1/E1/1	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
1/E1/2	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
1/E1/3	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
1/E1/4	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
1/E2/1	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
1/E2/2	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
1/E2/3	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
1/E2/4	INTEL SSDPE21K375GA	375.08 GB	0.00 GB

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

Controller(1): NVMe

Global View
Physical
Logical
Setting
Event
SHI
Help

Create Array
Spare Pool
Logical Device
Rescan

Create Array

Array Type: RAID 0
Array Name: Default
Initialization Method: Keep Old Data
Cache Policy:
Block Size: 512K

Select All

	Location	Model	Capacity	Max Free
<input type="checkbox"/>	1/E1/1	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
<input type="checkbox"/>	1/E1/2	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
<input type="checkbox"/>	1/E1/3	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
<input type="checkbox"/>	1/E1/4	Micron_9300_MTFDHAL3T8TDP	3.84 TB	0.00 GB
<input type="checkbox"/>	1/E2/1	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E2/2	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E2/3	INTEL SSDPE21K375GA	375.08 GB	0.00 GB
<input type="checkbox"/>	1/E2/4	INTEL SSDPE21K375GA	375.08 GB	0.00 GB

Capacity: (According to the max free space on the selected disks)
Maximum (MB)

Create

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

SSD7202:

The screenshot displays the HighPoint RAID Management 2.13.3 interface. The top navigation bar includes tabs for Global View, Physical, Logical (selected), Setting, Event, SHI, and Help. On the left sidebar, there are links for Create Array, Spare Pool, Logical Device, and Rescan. The main content area is divided into two sections: Logical Device Information and Physical Device Information.

Logical Device Information						
Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
Device_1_E1_1	Hard Disk	250.05 GB			HPT DISK 0_0	Legacy
Device_1_E1_2	Hard Disk	250.05 GB			HPT DISK 0_1	Legacy
Device_1_E2_1	Hard Disk	250.05 GB			HPT DISK 0_2	Legacy
Device_1_E2_2	Hard Disk	250.05 GB			HPT DISK 0_3	Legacy

Physical Device Information			
Location	Model	Capacity	Max Free
1/E1/1	Samsung SSD 960 EVO 250GB	250.05 GB	0.00 GB
1/E1/2	Samsung SSD 960 EVO 250GB	250.05 GB	0.00 GB
1/E2/1	Samsung SSD 960 EVO 250GB	250.05 GB	0.00 GB
1/E2/2	Samsung SSD 960 EVO 250GB	250.05 GB	0.00 GB

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

5. You can view information about both controllers using the **Physical** tab. Note, the interface will refer to the controllers as “Enclosure 1” and “Enclosure 2”.

The screenshot shows the Physical tab selected in the HighPoint RAID Management 2.13.3 interface. The left sidebar shows a tree view with 'Controller 1' expanded, containing 'Enclosure 1' (selected), 'Enclosure 2', and 'Rescan'. The main content area displays 'Enclosure Information' for the selected enclosure.

Enclosure Information	
Model:	SSD7202
Vendor:	HighPoint
ID:	1
PCI Bus Number:	101
PCI Device Number:	0
PCI Func Number:	0
Current Link Width:	x8
Current Link Speed:	8.0 GT/s

Array Type:

This drop-down menu allows you to specify the RAID level. An array is a collection of physical disks that will be one virtual drive by your Operating System (OS).

The SSD7202 is capable of creating the following types of arrays:

- RAID 0 — Striping
- RAID 1 — Mirroring

The SSD7101A-1, SSD7103, SSD7120, SSD6540, SSD6540M, SSD7104, SSD7184, SSD7105, SSD7505 and SSD7204 controllers can create the following types of arrays:

- RAID 0 — Striping
- RAID 1 — Mirroring
- RAID10 — Striping Mirrored array

Each RAID level has its pros and cons based on the application you use it for (Note: Refer to RAID level Quick Reference)

Array Name: the name that will be displayed in Logical Device Information (Default: RAID_<level>_<array number>)

Initialization Method:

Initialization of a disk sets all data bits to 0, essentially clearing all the data on the drive. It is important to initialize disks as previous data physically stored on the drive may interfere with new data.

- **Keep Old Data:** This option skips the initialization process and all data on each physical disk of the array will be untouched.
- **Quick Init:** This option grants immediate access to the RAID array by skipping the initialization process, but it will delete all data. Note: Skipping initialization is generally not recommended as residual data on disks may interfere with new data in the future.
- **Foreground:** The array initialization process will be set at high priority. During this time array is not accessible, but the initialization process will complete much faster.
- **Background:** The array initialization process will have a lower priority. During this time the array will be accessible, but the initialization process will take much longer to complete.

Note: Using a Samsung 970 EVO Plus 500GB as an example; RAID 1 Initialization (Foreground) time is approximately 10 minutes. Initialization using the Background option would take 12 minutes to complete.

Background and Foreground Initialization

Foreground initializing the array will completely zero out the data on the disks, meaning the disk will be completely wiped and every bit on the disk will be set to 0. Background initialization means the array will still be created, and you can still write new data onto the array. But when your array requires rebuilding, residual data left behind may interfere with the process.

Block Size (default: 512K)

SSD7103/7202/7105/7505: [supported block sizes: 128K/256K/512K]
SSD7101A-1/

SSD7120/7104/6540/6540M/7204/7184/7180: [supported block sizes: 16K/32K/64K/128K/256K/512K/1024K]

Adjusting the block size towards your disk usage can result in some performance gain.

In a typical RAID configuration, data of the virtual drive is striped (or spread across) the physical drives. Having a smaller array block size will increase the likelihood of accessing all physical drives when processing large I/O requests. Multiple physical drives working in parallel increases the throughput, meaning better performance.

For smaller I/O requests (512 bytes to 4 kilobytes), it is better to have each individual disk handle their own I/O request, improving the IOPS (I/O per second), rather than having one tiny I/O request being handled by multiple disks.

Capacity (Default: Maximum)

This section allows you to set the total amount of space you want the RAID array to use. When creating RAID levels, disk capacities are limited by the smallest disk.


An example of how disk capacities are limited by smallest disk:

- You have 2 drives connected to the enclosure.
- The first drive is 6 TB, the second is 4 TB
- After creating a RAID level 1 using both drives and maximum capacity, the first drive will have 2 TB, the second 0 TB of free capacity
- The free capacity on the second drive can be used to create a separate array with other drives.

Adding Spare Disks

Note: This function is only supported by SSD7101A-1, SSD7103, SSD7105, SSD7505, SSD6540, SSD6540M, SSD7120, SSD7184, SSD7180, SSD7104 and SSD7204 RAID controllers.

Spare disks are physical disks that will immediately replace critical disks in an array.

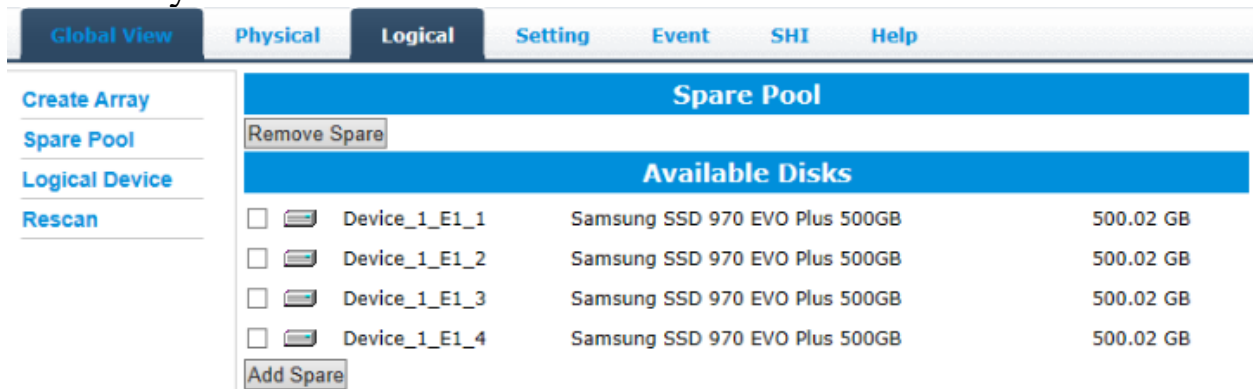


To add spare disks:


1. Open the WebGUI
2. Click Logical
3. Click Spare Pool:



4. Check the box for the disk you want as a spare under **Available Disks**
5. Click **Add Spare**, and confirm by selecting OK from the pop-up window:

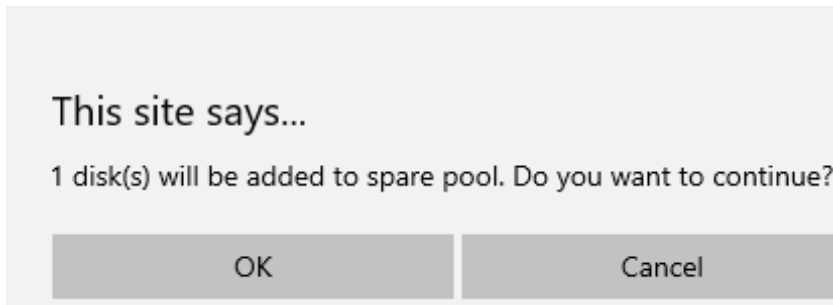

6. The disk has now been assigned as a spare. Click **OK** to confirm:

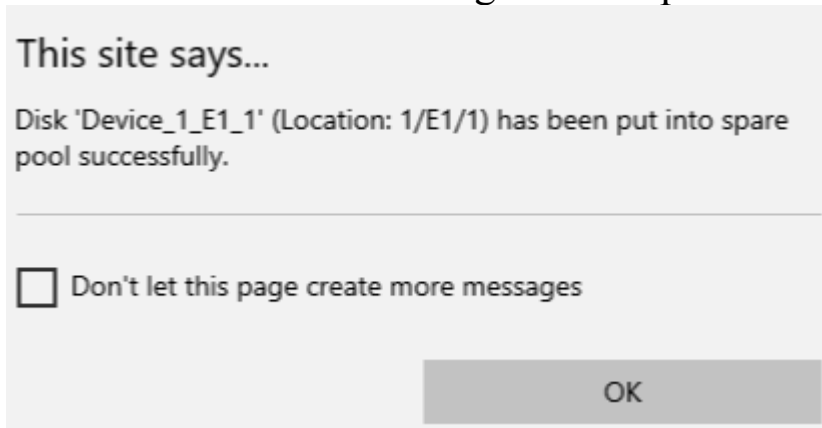

Disks added to the spare pool will be displayed under **Spare Pool** and can be removed by checking the box before the target drive, then clicking the **Remove Spare** button.

Physical drives marked as a spare will automatically be added to an array whenever there is a disk failure. This feature minimizes the chances of a data loss by reducing the time an array is in the critical status.

Obtaining Logical Device Information


The Logical device tab is the default page after clicking the Logical tab of the HRM. This page contains information about your RAID arrays and the individual disks your system detects.

Logical Device Information

Arrays you create and the properties associated with them will appear here.

Maintenance


Once an array has been created, the Maintenance menu provides options to maintain or edit it. To access the Maintenance menu, click the **Maintenance** button towards the right-hand side of the array name.

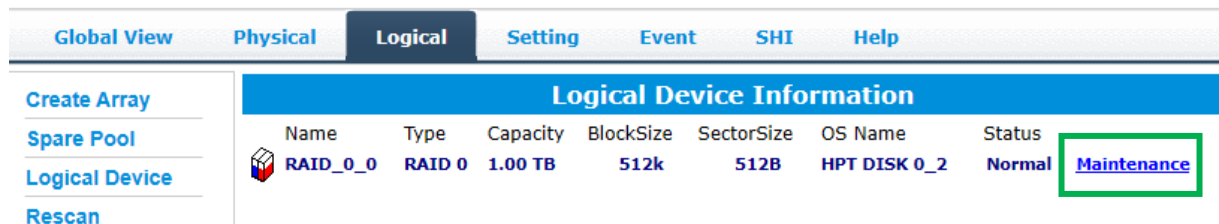

Array Information

Clicking on the **Maintenance** button will show you the Array information box. Different array statuses (Normal, critical, disabled) will have different maintenance options.

Array Information & Maintenance Options: Normal Status

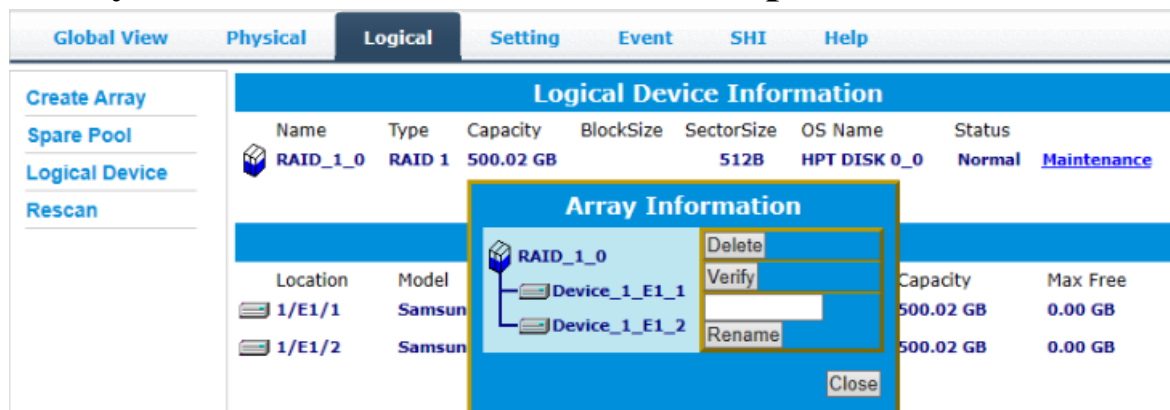

Arrays with the **Normal** status are healthy and functioning properly, and have the following options:

Delete – deletes the selected RAID array

Verify – verifies the integrity of the RAID array

Rename – renames the RAID array.

Array Information & Maintenance Options: Critical Status

The screenshot displays a RAID management interface. On the left, a sidebar contains links: 'Create Array', 'Spare Pool', 'Logical Device', and 'Rescan'. The main area has tabs: 'Global View', 'Physical', 'Logical' (selected), 'Setting', 'Event', 'SHI', and 'Help'. Below the 'Logical' tab, a table titled 'Logical Device Information' shows the following data:

Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
RAID_1_0	RAID 1	500.02 GB		512B	HPT DISK 0_0	Critical Maintenance

An 'Array Information' dialog box is overlaid on the table. It shows a tree view for 'RAID_1_0' with two components: 'Device_1_E1_1' (online) and 'Offline Disk'. To the right of this tree are buttons for 'Delete' and 'Add Disk'. At the bottom of the dialog is a 'Close' button. The 'Add Disk' button is highlighted with a yellow box.

Arrays in the **Critical** status can be accessed and utilized, but are no longer fault tolerant. A Critical array should be rebuilt as soon as possible to restore redundancy.

A critical status array has all the normal status options except the following:

- The Array can no longer be renamed
- **Add Disk** replaces the **Verify Disk** option

Once the array status changes to critical, the faulty disk will be taken offline and you can either:

- Reinsert the same disk
- Insert a new disk

Reinserting the same disk should trigger the rebuilding status, since data on the disk would be recognized.

If you insert a new disk, clicking **Add Disk** will give you the option to select that disk and add it to the array.

Array Information & Maintenance Options: Disabled Status

The screenshot shows a RAID management interface with a top navigation bar containing 'Global View', 'Physical', 'Logical' (selected), 'Setting', 'Event', 'SHI', and 'Help'. On the left, a sidebar lists 'Create Array', 'Spare Pool', 'Logical Device', and 'Rescan'. The main area is titled 'Logical Device Information' and contains a table with the following data:

Name	Type	Capacity	BlockSize	SectorSize	OS Name	Status
RAID_0_0	RAID 0	1.00 TB	512k	512B		Disabled

Next to the 'Disabled' status is a 'Maintenance' link. A modal window titled 'Array Information' is open, showing a tree view of the RAID_0_0 array with 'Device_1_E1_1' selected. A 'Delete' button is highlighted next to the selected device. The modal also shows 'Offline Disk' and 'Close' buttons. In the background, another table shows 'Location' (1/E1/1), 'Model' (Samsung), 'Capacity' (00.02 GB), and 'Max Free' (0.00 GB).

An array with the **Disabled** status means that the RAID level does not have enough disks to function.


- Your data will be inaccessible
- Rebuilding will not trigger, since the RAID array does not have enough parity data to rebuild.

Your options in Maintenance are:

- Delete

Delete – will delete the array

Physical Device Information

Global View Physical Logical Setting Event SHI Help				
Controller 1 Enclosure 1 Devices Rescan		Physical Devices Information		
		 Device 1_E1_1 Model	Samsung SSD 970 EVO Plus 500GB	Capacity 500.02 GB
		Revision	2B2QEXM7	PCIe Width x4
		Location	1/E1/1	PCIe Speed Gen 3
		Max Free	0.00 GB	
		Status	Normal	
		Serial Num	S4EVNF0MA42420T	

- **Model** — model number of the drive connected
- **Revision** — revised version of drive
- **Location** — which controller and port the drive is in
- **Max Free** — total capacity that is not configured
- **Status** — Current state of drive
- **Serial Num** — Serial number of the drive
- **Capacity** — total capacity of the drive
- **PCIe Width** — PCIe width occupied by the driver
- **PCIe Speed** — Rate of current bandwidth

Rescan

Clicking **Rescan** will ask the driver to recheck and report the array status. When Rescan is initiated by the WebGUI; the driver will immediately check and see whether the status of any disk has changed. If there are any changes, the status of the disks and RAID array will be updated to reflect this.

- **Disk Status** – if any disks were added or removed, or if a disk is no longer responding, the status will change.
- **RAID status** – the RAID array's status may change depending on the status of the disks.

System Setting

The screenshot shows the 'System Setting' tab in the HighPoint RAID Management software. The interface has a top navigation bar with tabs: Global View, Physical, Logical, Setting (selected), Event, SHI, and Help. On the left, there is a sidebar with 'System' and 'Email' options. The main content area is divided into two sections: 'System Setting' and 'Password Setting'. The 'System Setting' section includes five configuration items: 'Enable auto rebuild' (set to Enabled), 'Enable Continue Rebuilding on error' (set to Enabled), 'Restrict to localhost access' (set to Enabled), 'Set Rebuild Priority' (set to Medium), and 'Port Number' (set to 7402). Each item has a corresponding dropdown menu. Below these settings is a 'Submit' button. The 'Password Setting' section has two input fields for 'Password' and 'Confirm', followed by a 'Submit' button. At the bottom of the window, the text reads: 'HighPoint RAID Management 2.13.3 Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved'.

System Setting	
Enable auto rebuild.	Enabled ▾
Enable Continue Rebuilding on error.	Enabled ▾
Restrict to localhost access.	Enabled ▾
Set Rebuild Priority:	Medium ▾
Port Number:	7402
<input type="button" value="Submit"/>	

Password Setting	
Password:	<input type="text"/>
Confirm:	<input type="text"/>
<input type="button" value="Submit"/>	

HighPoint RAID Management 2.13.3
Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved

Using this tab, you can change the following:

- Enable auto-rebuilding
- Enable rebuilding on error
- Restrict to localhost
- Set rebuild priority
- Change port number
- Change HRM password

System Setting

Enable auto rebuild (default: Enabled)

When a physical drive fails, the controller will take the drive offline. Once you re-insert or replace the disk, the controller will not automatically rebuild the array unless this option is enabled.

Enable continue rebuilding on error (default: Enabled)

When enabled, the rebuilding process will ignore bad disk sectors and continue rebuilding until completion. When the rebuild is finished, the data may be accessible but may also be inconsistent, due to any bad sectors that were ignored during the procedure. If this option is enabled, HighPoint recommends checking the event log periodically for bad sectors warnings.

Restrict to localhost access (default: Enabled)

Remote access to the controller will be restricted when enabled; other users in your network will be unable to remotely log in to the HRM.

Rebuild Priority (default: Medium)

You can specify the amount of system resources you want to dedicate to rebuilding the array. There are 5 levels of priority [Lowest, Low, Medium, High, Highest]

Port Number (default: 7402)

The default port that the HighPoint HRM listens on is 7402. You may change it to any open port.

Password Settings

Changing your HRM password

Under Password Setting, type your new password, confirm it, then click **Submit**.

Recovering your HRM password

If you forget your password, you can delete the file hptuser.dat. Then, restart the computer and open the WEBGUI to set a new password.

For **Windows** Users:

1. Open **File Explorer**
2. Navigate to **C:/Windows/**
3. Delete **hptuser.dat**
4. Reboot

Email Setting

The following topics are covered under email:

SMTP Setting

Adding Recipients

You can instruct the controller to send an email out to the recipients of your choosing when certain events trigger (for more information, see Event Tab).

SMTP settings

SMTP Setting

☒ Enable Event Notification

Server Address (name or IP): smtp.mail.yahoo.com

Mail From (E-mail address): hptu@yahoo.com

Login Name: hptu@yahoo.com

Password:

SMTP Port: 465

Support SSL: ☒

[Change Setting](#)

Note: After you click **Change Setting**, the password field will be reset.

To set up email alerts:

Using a **Yahoo Mail** account as an example:

1. Check the **Enable Event Notification** box.
2. Enter the ISP server address name or SMTP name
For example: **smtp.mail.yahoo.com**
3. Type in the email address of the **sender** (email account that is going to **send** the alert)
For example: **hptu@yahoo.com**
4. Type in the account name and password of the sender
5. Type in the SMTP port (default: **25**)
6. Check the **support SSL** box if SSL is supported by your ISP (note the port value will change to **465**).

Email Precautions

If you want to receive notification mail using a Webmail account, you may need to modify the mailbox's permissions. The following example is for a Yahoo webmail account.


To change permission settings, please refer to the following link:
<https://help.yahoo.com/kb/account/SLN27791.html?impressions=true>

Procedure:


Step 1. Log in to yahoo email; click "**Sign in**" to log in:
<https://www.yahoo.com>



Step 2. After a successful login, click "**Account Info**" under the user name:

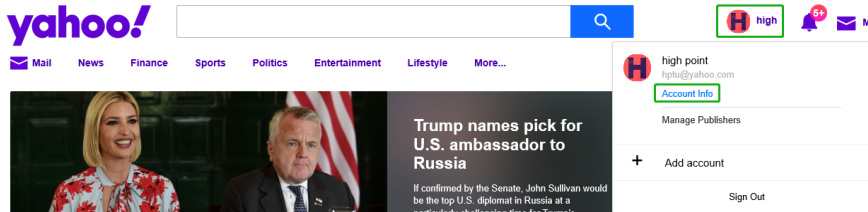

Step 3. Go to the "**Account Info**" page, click "**Account Security**".
On the "Account Security" page, click the "**Allow apps that use less secure sign in**" button:

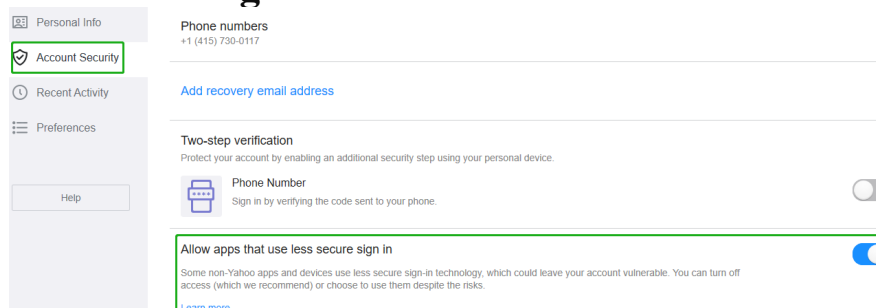


Note: If you are having trouble configuring notification for your Email account, please contact our [Technical Support Department](#).

How to Add Recipients


You can add multiple email addresses as receivers of a notice.

1. Type the email of the recipient in the **E-mail** text box
2. Type the name of the recipient in the **Name** text box
3. Set which type(s) of events will trigger an email using the respective **Event Level** check boxes.

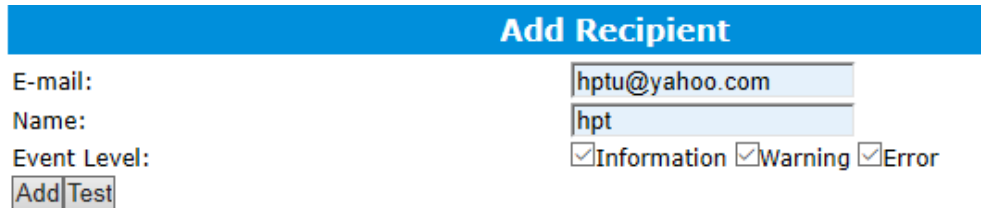


The 'Add Recipient' form has a blue header. It contains three text input fields: 'E-mail:' with 'hptu@yahoo.com', 'Name:' with 'hpt', and 'Event Level:' with three checked checkboxes: 'Information', 'Warning', and 'Error'. At the bottom are two buttons: 'Add' and 'Test'.

4. **(Optional)** Click **test** to confirm the settings are correct by sending out a test email

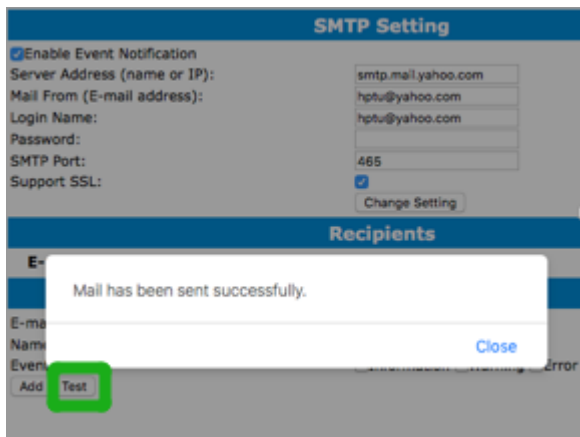

This screenshot shows two sections. The 'SMTP Setting' section has a blue header and includes a checked 'Enable Event Notification' box, and fields for 'Server Address (name or IP):' (smtp.mail.yahoo.com), 'Mail From (E-mail address):' (hptu@yahoo.com), 'Login Name:' (hptu@yahoo.com), 'Password:', 'SMTP Port:' (465), and 'Support SSL:' (checked). A 'Change Setting' button is at the bottom. The 'Recipients' section has a blue header and shows a table with one row: 'hptu@yahoo.com', 'hpt', and 'Information, Warning, Error'. A green box highlights the 'Test' button. A white message box in the center says 'Mail has been sent successfully.' with a 'Close' button.

5. Click **add** to add the recipient to recipient list
6. The added recipient will display in under **Recipients**

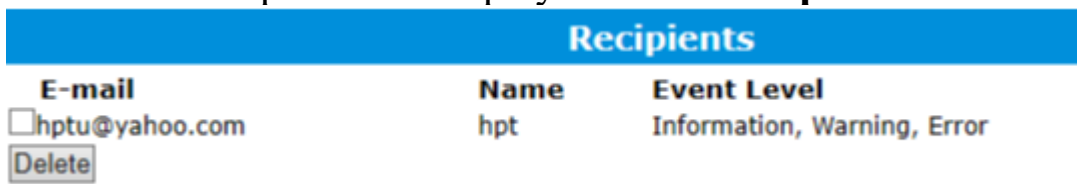

The 'Recipients' section has a blue header. Below it is a table with three columns: 'E-mail', 'Name', and 'Event Level'. The first row contains 'hptu@yahoo.com', 'hpt', and 'Information, Warning, Error'. A 'Delete' button is located below the first column.

E-mail	Name	Event Level
hptu@yahoo.com	hpt	Information, Warning, Error

The email will include the output recorded in the event log.

Example email message:

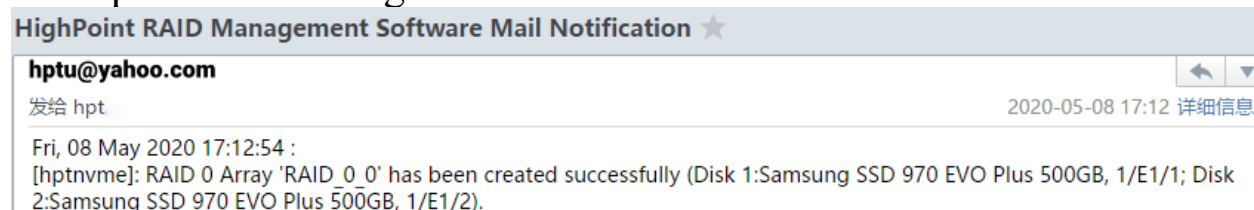


Figure 1. Example event log email

Event Tab

In the event tab, you can see log entries associated with the HighPoint device. The event log provides useful information when troubleshooting your set up.

In the event tab, there are four options available:

Download – Save the log file on your computer

Clear – Clears all log entries

Prev – View previous log page

Next – View next log page

SHI (Storage Health Inspector)

- S.M.A.R.T Attributes
- Schedule a task (Task list and Health Inspector Scheduler)

SHI outputs information collected using SMART (Self-Monitoring Analysis and Reporting Technology) Hard Drive Technology. The data provided on this tab helps you to anticipate any disk failures based on a variety of monitored hard disk properties.

How to Enable SMART Monitoring

To access the SMART attributes of an individual disk:

1. Log in to the WebGUI
2. Select the proper controller using the drop-down menu on the top left
3. Click the **SHI** tab
4. Click **Detail** on the desired disk:

***Note:** The current NVMe **Temperature threshold** is set to 60°C. If it does not exceed 60°C, it will display “Normal”;*

Global View Physical Logical Setting Event SHI Help						
Storage Health Inspector(SHI)						
Controller ID	Location#	Device Serial Number	RAID	Temperature	Total Bytes Written	S.M.A.R.T
1	E1_1	S4EVNF0MA42420T	None	Normal	113.01 TB	Detail
1	E1_2	S4EVNF0MA42424P	None	Normal	120.27 TB	Detail
Device Name Device_1_E1_2						
Model Number Samsung SSD 970 EVO Plus 500GB						
Temperature Celsius 39						
NVME S.M.A.R.T Attributes						
Name		Value				
Critical Warning		0x0				
Composite Temperature (C)		39				
Available Spare		100%				
Available Spare Threshold		10%				
Percentage Used		18%				
Data Units Read		0x21be808a				
Data Units Written		0xf650a9e				
Host Read Commands		0x7da99231				
Host Write Commands		0x38146342				
Controller Busy Time		0x1894				
Power Cycles		0x396				
Power On Hours		0x4c3				
Unsafe Shutdowns		0x2a5				
Media and Data Integrity Errors		0x0				
Number of Error Information Log Entries		0x3f2				
Warning Temperature Time		0x0				
Critical Composite Temperature Time		0x0				
Temperature Sensor 1 (C)		39				
Temperature Sensor 2 (C)		49				
Temperature Sensor 3 (C)		0				
Temperature Sensor 4 (C)		0				
Temperature Sensor 5 (C)		0				
Temperature Sensor 6 (C)		0				
Temperature Sensor 7 (C)		0				
Temperature Sensor 8 (C)		0				

If the temperature exceeds 60°C, it will display “**High**”.

Global View	Physical	Logical	Setting	Event	SHI	Help
Storage Health Inspector(SHI)						
Controller ID	Location#	Device Serial Number	RAID	Temperature	Total Bytes Written	S.M.A.R.T
1	E1_1	S4EVNF0MA42420T	RAID_1_0	Normal	113.03 TB	Detail
1	E1_2	S4EVNF0MA42424P	RAID_1_0	High	120.74 TB	Detail
Device Name		Device_1_E1_2				
Model Number		Samsung SSD 970 EVO Plus 500GB				
Temperature Celsius		61				

The **TBW** (Total Bytes Written) information can be used to monitor the lifespan of the NVMe drives.

Global View	Physical	Logical	Setting	Event	SHI	Help
Storage Health Inspector(SHI)						
Controller ID	Location#	Device Serial Number	RAID	Temperature	Total Bytes Written	S.M.A.R.T
1	E1_1	S4EVNF0MA42420T	None	Normal	113.01 TB	Detail
1	E1_2	S4EVNF0MA42424P	None	Normal	120.27 TB	Detail

How to Use the Health Inspector Scheduler

The screenshot shows the 'Health Inspector Scheduler' interface. At the top, there is a navigation bar with tabs: Global View, Physical, Logical, Setting, Event, SHI, and Help. Below this is a 'Tasks List' section. The main area is titled 'New Verify Task'. It contains a 'Task Name' field with the value 'RAID_1_0'. Below this is a 'Schedule' section with radio buttons for 'Occurs one time on' and 'Occurs every'. The 'Occurs every' option is selected. It includes a dropdown for 'Day(s)' set to '1', a dropdown for 'on' set to 'Sunday', and a time field set to '0:0:0'. There are also 'Start date' and 'End date' fields, both set to '2020-4-10'. A 'Submit' button is at the bottom. Below the form is a footer with the text: 'HighPoint RAID Management 2.13.3 Copyright (c) 2018 HighPoint Technologies, Inc. All Rights Reserved'.

The **Health Inspector Scheduler (HIS)** enables you to schedule disk/array checkups to ensure disks/array are functioning optimally. If you want to check the disk status on a daily, weekly, or monthly basis, you can enable this using the **HIS** function.

For example:

1. Set the 'Task Name' to 't1', select the schedule as 'Daily', and set the time to 10:10
2. After clicking "Submit", the task you created will be shown under the "Task List".

The screenshot shows the 'Health Inspector Scheduler' interface. At the top, there is a navigation bar with tabs: Global View, Physical, Logical, Setting, Event, SHI, and Help. Below this is a 'Tasks List' section. It contains a table with two columns: 'Name' and 'Description'. The table has one row with the name 't1' and the description 'Check all disks every day at 10:10:0'. Below the table is a 'Delete' button. Below the 'Tasks List' section is the 'Health Inspector Scheduler' form. It contains a 'Task Name' field, a 'Select a Schedule' section with radio buttons for 'Daily', 'Weekly', 'Bi-Weekly', and 'Monthly', and a 'Select a time' section with a dropdown for 'Sunday', a dropdown for '1', and a time field set to '0:0:0'. A 'Submit' button is at the bottom.

When the operating temperature of the disk exceeds 60°, a “Warning” event will appear in “Events”:

The screenshot shows the 'Event View (1)' interface. At the top, there is a navigation bar with tabs: Global View, Physical, Logical, Setting, Event, SHI, and Help. Below this is a section titled 'Event View (1)'. It contains a row of radio buttons for 'All', 'Info', 'Warning', and 'Error'. The 'Warning' option is selected. Below this is a table with two columns: 'Date Time' and 'Description'. The table has one row with the date '2020/5/9 10:9:37' and the description 'Disk 'Samsung SSD 970 EVO Plus 500GB' (Location: Device_1_E1_2) temperature is higher than threshold.'. The text 'threshold.' is highlighted with a green box.

How to Create a New Verify Task

All Redundant RAID arrays (RAID 1) will appear under New Verify Task

1. Log into the WebGUI
2. Select the proper controller from the top left drop down
3. Click **SHI**
4. Click **Schedule**
5. Select the array you want to schedule the verify task
6. Type the name in **Task Name** entry box
7. Choose whether you want to schedule
8. One time verify task on specific date (YYYY-MM-DD) at (HH:MM:SS, 24-hr clock)
9. Or a specific schedule you can adjust based on Daily, Weekly, or Monthly options
10. Click **Submit**

New Verify Task

☒ RAID_1_0

Task Name:

☐ Occurs one time on -- at ::

Schedule: ☒ Occurs every Day(s) on at ::

Start date: -- ☒ End date: -- ☐ No end date

11. Your entry will appear under **Tasks List**


Tasks List	
Name	Description
<input type="checkbox"/> t1	Verify array "RAID_1_0" every day at 14:00:00 from 2020-5-9 to 2020-6-9.
<input type="button" value="Delete"/>	

Note: New Verify Task box only appears if you have normal status arrays. If you have a critical array, New Rebuild Task will replace New Verify Task.


Using the HighPoint Command Line Interface (CLI)

How to use the CLI in Windows


Method1: Run ‘**Command Prompt**’ as **Administrator** and enter **hptraidconf** and press Enter

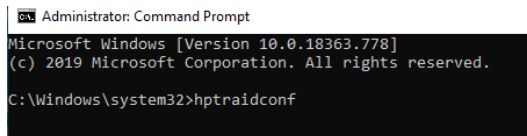

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.18363.778]
(c) 2019 Microsoft Corporation. All rights reserved.
C:\Windows\system32>hptraidconf
```

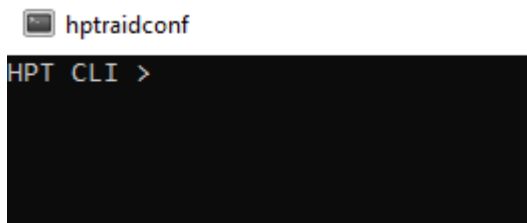

Method2: Click ‘**Start**’ to find the **HighPoint RAID Management** folder, and click on **hptraidconf**

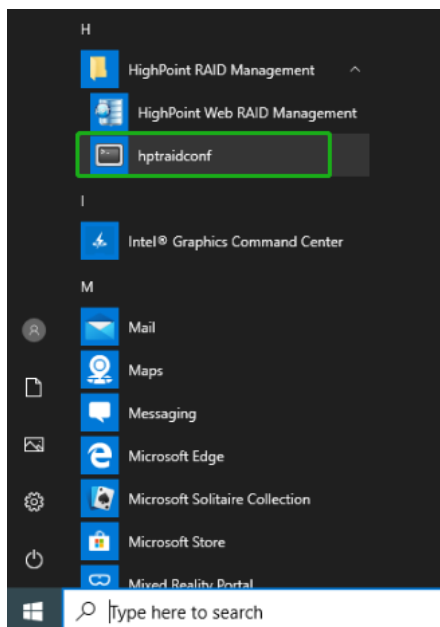

How to use the CLI in a Linux system

Open ‘**Terminal**’ and enter root permissions, then execute the command ‘**hptraidconf**’ to enter the CLI

```
File Edit View Search Terminal Help
test@test-System-Product-Name:~$ sudo su
[sudo] password for test:
root@test-System-Product-Name:/home/test# hptraidconf
```

CLI Command Reference

This chapter discusses the various HighPoint CLI commands: Query, Create, Delete, OCE/ORLM, Rebuild, Verify, Unplug, Switch, Lscard, Rescan, Init, Events, Mail, Task, Set, Clear, Help and Exit.

Warning: *using Create/Delete commands may destroy data stored in the disks, and this lost data can never be recovered. Please be cautious when executing these commands. The CLI utility will not prompt you before each command is executed.*

The following example is for a Windows system:

Query Commands

Syntax:

query controllers | query devices | query devices {devices_id} |
query arrays | query arrays {array_id}

query controllers

This command reports controller information

Single card:

SSD7202:

```
HPT CLI > query controllers
ID          Channel      Name
1           2           HighPoint NVMe RAID Controller
```

SSD7101A-1/6540/6540M/7120/7103/7204/7104/7105/7505:

```
HPT CLI > query controllers
```

ID	Channel	Name
1	4	HighPoint NVMe RAID Controller

```
HPT CLI >
```

SSD7184/7180:

```
HPT CLI > query controllers
```

ID	Channel	Name
1	8	HighPoint NVMe RAID Controller

query enclosures

This command reports Product ID information.

Single card:

SSD7101A-1:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7101A-1	4

SSD7104:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7104	4

SSD7120:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7120	4

SSD7103:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7103	4

SSD7202:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD7202        2
```

SSD7204:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD7204        4
```

SSD6540/SSD6540M:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD6540        4
```

SSD7184:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD7184        8
```

SSD7180:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD7180        8
```

SSD7105:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD7105        4
HPT CLI >
```

SSD7505:

```
HPT CLI > query enclosures
ID   VendorID      ProductID      NumberOfPYH
-----
1    HPT             SSD7505        4
HPT CLI >
```

Cross-Sync:

Note: This function is only supported by SSD7101A-1, SSD7120 and SSD7202

SSD7101A-1:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7101A-1	4
2	HPT	SSD7101A-1	4

SSD7120:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7120	4
2	HPT	SSD7120	4

SSD7202:

```
HPT CLI > query enclosures
```

ID	VendorID	ProductID	NumberOfPYH
1	HPT	SSD7202	2
2	HPT	SSD7202	2

query devices

This command will provide the status of each physical device hosted by the controller. It provides a list of device ID's, capacity, model numbers, status, and array attributes. Each device's status will be listed as one of the following: NORMAL, DISABLED, SPARE, RAID and BOOT.

Attributes:

ID:

A device ID is a string used to represent a disk. It is in the format "controller/channel/device" for NVMe controllers. E.g. 1/E1/1 represents the disk on controller 1 port 1;

Capacity:

The capacity of the disk in GB.

MaxFree:

The Maximum sequence free space on a disk which can be used by creating array.

Flag:

Shows whether the disk is **single** or has been created **RAID**.

Status:

This will display the disk status (1 of 4 possible states):

- **NORMAL**: The disk's status is normal.
- **DISABLED**: The disk cannot be used. (may be related to disk failure or removal)
- **RAID**: The disk is a member of a RAID array.
- **SPARE**: The disk has been set as a spare disk

ModelNumber:

The disk's model number.

Example:

Single card:

SSD7202:

```
HPT CLI > query devices
```

ID	Capacity	MaxFree	Flag	Status	ModelNumber
1/E1/1	500.03	0	RAID	NORMAL	Samsung SSD 970 EVO Plus 500GB
1/E1/2	500.03	0	RAID	NORMAL	Samsung SSD 970 EVO Plus 500GB

SSD7101A-1/7103/7120/7204/7104/7505/7105:

```
HPT CLI > query devices
```

ID	Capacity	MaxFree	Flag	Status	ModelNumber
1/E1/1	500.03	500.03	SINGLE	NORMAL	Samsung SSD 970 EVO Plus 500GB
1/E1/2	500.03	500.03	SINGLE	NORMAL	Samsung SSD 970 EVO Plus 500GB
1/E1/3	500.03	500.03	SINGLE	NORMAL	Samsung SSD 970 EVO Plus 500GB
1/E1/4	500.03	500.03	SINGLE	NORMAL	Samsung SSD 970 EVO Plus 500GB

```
HPT CLI >
```

SSD7101A-1/7120 Cross-Sync:

```
HPT CLI > query devices
```

ID	Capacity	MaxFree	Flag	Status	ModelNumber
1/E1/1	512.11	0	SINGLE	LEGACY	Samsung SSD 970 PRO 512GB
1/E1/2	512.11	0	SINGLE	LEGACY	Samsung SSD 970 PRO 512GB
1/E1/3	512.11	0	SINGLE	LEGACY	Samsung SSD 970 PRO 512GB
1/E1/4	512.11	0	SINGLE	LEGACY	Samsung SSD 970 PRO 512GB
1/E2/1	1000.20	0	SINGLE	LEGACY	WDS100T3X0C-00SJG0
1/E2/2	1000.20	0	SINGLE	LEGACY	WDS100T3X0C-00SJG0
1/E2/3	1000.20	0	SINGLE	LEGACY	WDS100T3X0C-00SJG0
1/E2/4	1000.20	0	SINGLE	LEGACY	WDS100T3X0C-00SJG0

query devices {device_id}

This command presents information for the specified device.

Attributes:

Mode Number:

The disk's model number.

Serial Number:

The disk's Serial number.

Firmware Version:

The disk's Firmware version.

Read Ahead/Write Cache/TCQ/NCQ Status:

Disk's Read Ahead/Write Cache/TCQ/NCQ status could be enabled/disabled/--(not support)

S.M.A.R.T Attributes:

S.M.A.R.T Attributes detailed information reported by hard disk.

Example:

```
HPT CLI > query devices 1/E1/1
Mode Number:      Samsung SSD 970 EVO Plus 500GB
Serial Number:    S4EVNF0MA42420T
Firmware Version: 2B2QEXM7
Capacity(GB):    500.03          TotalFree(GB): 0
Status:          RAID           Flag:          NORMAL
Read Ahead:      --             Write Cache:    --
TCQ:             --             NCQ:           --
-----
S.M.A.R.T Failed
```

query arrays

This command lists information for all configured arrays. It will list each array's ID, capacity, RAID level, and status information.

Note: An array ID is generally represented by number or set of numbers.

Attributes:

Type:

SSD7202: The array's type. (RAID0, RAID1)

SSD7101A-1/7103/7120/7204/7104/6540/6540M/7105/7505:

The array's type. (RAID0, RAID1, RAID10)

Status:

- NORMAL: Array status is normal
- DISABLED: Array is disabled.
- REBUILDING: Array is being rebuilt
- VERIFYING: Array is verifying
- INIT(F): Initializing an array using Foreground mode
- INIT(B): Initializing an array using Background mode
- UNINITIALIZED: Array is not initialized
- CRITICAL: Array is in a degraded status (no data redundancy)

Block:

Array Block size.

Sector:

Bytes per sector.

Cache:

Array Cache Policy

WT: Write Through

WB: Write Back

NONE: No Cache policy enabled

Example:

```
HPT CLI > query arrays
```

ID	Capacity(GB)	Type	Status	Block	Sector	Cache	Name
1	500.03	RAID1	NORMAL	--	512B	NONE	RAID_1_0

query arrays {arrays_id}

This command will present information of each disk of a specified array.

Example:

```
HPT CLI > query arrays 1
ID: 1 Name: RAID_1_0
Type: RAID1 Status: NORMAL
Capacity(GB): 500.03 BlockSize: --
SectorSize: 512B CachePolicy: NONE
Progress: --
ID Capacity MaxFree Flag Status ModelNumber
-----
1/E1/1 500.03 0 NORMAL RAID Samsung SSD 970 EVO Plus 500GB
1/E1/2 500.03 0 NORMAL RAID Samsung SSD 970 EVO Plus 500GB
```

Init Commands

You can use init commands to initialize disks or arrays. A drive must be initialized first before being used to create arrays.

Syntax:

init {device_id} | init {array_id} {start|stop}

init {device_id}

This command initialize a disk for first use or a legacy disk on the controller.

Example:

After entering the CLI, enter the command: ‘**query devices**’ to view the current NVMe status is ‘**LEGACY**’, enter ‘**init 1/E1/1**’, NVMe status is ‘**NORMAL**’.

```
HPT CLI > query devices
ID Capacity MaxFree Flag Status ModelNumber
-----
1/E1/1 500.11 0 SINGLE LEGACY Samsung SSD 970 EVO Plus 500GB
1/E1/2 500.11 0 SINGLE LEGACY Samsung SSD 970 EVO Plus 500GB

HPT CLI > init 1/E1/1
HPT CLI > init 1/E1/2

HPT CLI > query devices
ID Capacity MaxFree Flag Status ModelNumber
-----
1/E1/1 500.03 500.03 SINGLE NORMAL Samsung SSD 970 EVO Plus 500GB
1/E1/2 500.03 500.03 SINGLE NORMAL Samsung SSD 970 EVO Plus 500GB
```

Note: This command instructs the controller to initialize the disk on controller 1 channel 1. All data on the disk will be destroyed.

init {array_id} {start|stop}

This command starts/stops the initialization process of a redundant RAID array (RAID 1)

Example:

```
HPT CLI > init 1 stop  
HPT CLI > init 1 start
```

This command instructs the controller to stop/start initialization process on array 1. Take Samsung 970 EVO PLUS as an example, create RAID1 init time is about 10 minutes.

Create Commands

This command allows you to create a new RAID array, add a spare disk, or expand/migrate an existing array.

Note: A drive must be initialized first before being used to create arrays.

Syntax:

create {RAID0|RAID1|RAID10 spare} [create-options]

Parameters

You can specify one or more create options for this command, separated by a space. The options can be typed in any order.

disks= specifies member disks which will compose a new array, e.g. disks=1/E1/1,1/E1/2, disks=*. The character * means all available drives.

NOTE: When you enter a complete command with parameters disks=* at the shell prompt, the correct writing is disks="*".

For example:

hptraidconf -u RAID -p hpt create RAID0 disks="*".

init= specifies the initialization option (foreground, background, quickinit, keep old data). The default option is create-only. The create-only option is applicable for all the RAID types, which is to create an array without any initialization process. Initialization is needed for redundant arrays to provide data redundancy.

foreground : Initialize an array using foreground mode. This is the recommended method when creating redundant RAID arrays.

background : Initialize an array using background mode. The array is accessible during array initialization.

quickinit : Do a quick init.

keep old data: This option will create the RAID array but keep existing data on RAID array. This option should be selected when trying to recover a RAID array.

name= specifies the name for the array being created.
If the option is omitted, the utility will assign a default name for the array.

src= specifies an existing array to be expanded/migrated. All data on the source array will be redistributed online to the target array. If this parameter is omitted, a new array is created.

capacity= specifies the capacity, in size of MB, for the target array.
Maximum capacity is default.

bs= specifies the block size, in KB, for the target array. This option is only valid for striped RAID levels. Default is 64KB.

sector= specifies the logical sector size, in B/KB, for the target array. This option is only valid for striped RAID levels. The default is 512 Bytes.

Examples:

```
HPT CLI > create RAID0 name=myraid0 disks=1/E1/1,1/E1/2
```

```
HPT CLI > query arrays 1
```

ID:	1	Name:	myraid0
Type:	RAID0	Status:	NORMAL
Capacity(GB):	1000.06	BlockSize:	64k
SectorSize:	512B	CachePolicy:	NONE
Progress:	--		

ID	Capacity	MaxFree	Flag	Status	ModelNumber
1/E1/1	500.03	0	NORMAL	RAID	Samsung SSD 970 EVO Plus 500GB
1/E1/2	500.03	0	NORMAL	RAID	Samsung SSD 970 EVO Plus 500GB

```
HPT CLI >
```

This command instructs the system to create a RAID0 array using the disks attached to controller 1 channels 1 and 2, and name it myraid0.

```
HPT CLI > create RAID0 disks=* capacity=* init=quickinit bs=512k
```

```
HPT CLI > query arrays 1
```

ID:	1	Name:	RAID0_0
Type:	RAID0	Status:	NORMAL
Capacity(GB):	4096.33	BlockSize:	512k
SectorSize:	512B	CachePolicy:	NONE
Progress:	--		

ID	Capacity	MaxFree	Flag	Status	ModelNumber
1/E1/1	512.04	0	NORMAL	RAID	Samsung SSD 970 PRO 512GB
1/E1/2	512.04	0	NORMAL	RAID	Samsung SSD 970 PRO 512GB
1/E1/3	512.04	0	NORMAL	RAID	Samsung SSD 970 PRO 512GB
1/E1/4	512.04	0	NORMAL	RAID	Samsung SSD 970 PRO 512GB
1/E2/1	1000.12	488.08	NORMAL	RAID	WDS100T3X0C-00S3G0
1/E2/2	1000.12	488.08	NORMAL	RAID	WDS100T3X0C-00S3G0
1/E2/3	1000.12	488.08	NORMAL	RAID	WDS100T3X0C-00S3G0
1/E2/4	1000.12	488.08	NORMAL	RAID	WDS100T3X0C-00S3G0

This command instructs the system to create a RAID0 array using the disks attached to controller 1 channels 1/2/3/4, and controller 2 channels 1/2/3/4; capacity is maximum, Block Size is 512KB.

```
HPT CLI > create RAID0 disks=* capacity=100000 init=quickinit bs=512k
```

```
HPT CLI > query arrays 1
```

ID:	1	Name:	RAID0_0
Type:	RAID0	Status:	NORMAL
Capacity(GB):	100.00	BlockSize:	512k
SectorSize:	512B	CachePolicy:	NONE
Progress:	--		

ID	Capacity	MaxFree	Flag	Status	ModelNumber
1/E1/1	500.03	450.03	NORMAL	RAID	Samsung SSD 970 EVO Plus 500GB
1/E1/2	500.03	450.03	NORMAL	RAID	Samsung SSD 970 EVO Plus 500GB

```
HPT CLI >
```

This command instructs the system to create a RAID0 array using the disks attached to controller 1 channels 1 and 2; capacity is 100GB, Block Size is 512KB.

```
HPT CLI > create spare disks=1/E1/1
HPT CLI > query devices
ID      Capacity  MaxFree  Flag  Status  ModelNumber
-----
1/E1/1  500.03      450.03   RAID  SPARE   Samsung SSD 970 EVO Plus 500GB
1/E1/2  500.03      450.03   RAID  NORMAL  Samsung SSD 970 EVO Plus 500GB
-----
HPT CLI >
```

This command instructs the system to set the disk on controller 1 channel 1 to function as a spare disk.

Delete Command

This command allows you to delete an existing RAID array or remove a spare disk. After deletion, the original array and all data on it will be lost. All the member disks will be listed as available single disks.

***Note:** If you want to use a single disk after deleting the RAID, please restart the system after deleting the RAID. When the single disk status shows the Legacy status in WEBGUI or CLI, it can be used normally.*

Syntax

delete {array_or_spare_ID}

Examples

```
HPT CLI > query arrays
ID      Capacity(GB)  Type  Status  Block  Sector  Cache  Name
-----
1        500.03    RAID1  NORMAL   --    512B    NONE   RAID_1_0
HPT CLI > delete 1
HPT CLI > query arrays
ID      Capacity(GB)  Type  Status  Block  Sector  Cache  Name
-----
HPT CLI >
```

This command instructs the system to delete the array whose id is “1”. You can query the array ID before the deletion.

```

HPT CLI > query devices
ID      Capacity  MaxFree  Flag   Status  ModelNumber
-----
1/E1/1  500.03      500.03   SINGLE SPARE   Samsung SSD 970 EVO Plus 500GB
1/E1/2  500.03      500.03   SINGLE NORMAL  Samsung SSD 970 EVO Plus 500GB
-----

HPT CLI > delete 1/E1/1

HPT CLI > query devices
ID      Capacity  MaxFree  Flag   Status  ModelNumber
-----
1/E1/1  500.03      500.03   SINGLE NORMAL  Samsung SSD 970 EVO Plus 500GB
1/E1/2  500.03      500.03   SINGLE NORMAL  Samsung SSD 970 EVO Plus 500GB
-----

HPT CLI >

```

This command is used to remove the spare disk on controller 1 channel 1.

Unplug Command

This command allows you to remove an array or disk from a running system without shutting down. It is only supported on SSD7120.

Syntax

unplug {array _id or device _id}

Examples

```

HPT CLI > query devices
ID      Capacity  MaxFree  Flag   Status  ModelNumber
-----
1/E1/1  500.03      500.03   SINGLE NORMAL  Samsung SSD 970 EVO Plus 500GB
1/E1/2  500.03      500.03   SINGLE NORMAL  Samsung SSD 970 EVO Plus 500GB
-----

HPT CLI > unplug 1/E1/1

HPT CLI > query devices
ID      Capacity  MaxFree  Flag   Status  ModelNumber
-----
1/E1/2  500.03      500.03   SINGLE NORMAL  Samsung SSD 970 EVO Plus 500GB
-----

HPT CLI >

```

This command allows you to remove a disk from a running system without shutting down.

```

HPT CLI > query arrays
ID      Capacity(GB)  Type   Status  Block  Sector  Cache  Name
-----
1        500.03      RAID1   NORMAL   --    512B   NONE   RAID1_3
-----

HPT CLI > unplug 1

HPT CLI > query arrays
ID      Capacity(GB)  Type   Status  Block  Sector  Cache  Name
-----
-----

HPT CLI >

```

This command instructs the controller to disconnect the array “1”; you can then disconnect the drives safely.

Rebuild Commands

You can use rebuild commands to rebuild a RAID1 array when it is critical or broken.

Syntax

```
rebuild {array_id} {device_id}
rebuild {array_id} {start|stop}
```

rebuild {array_id} {device_id}

This command allows you to add the specified disk to a broken array and rebuild it.

Example

```
HPT CLI> rebuild 1 1/E1/1
```

```
HPT CLI > rebuild 1 1/E1/1
HPT CLI > query arrays
ID      Capacity(GB)  Type    Status   Block  Sector  Cache  Name
-----
1        500.03    RAID1   CRITICAL  --    512B    NONE   RAID1_3
```

This command instructs the controller to add the disk “1/E1/1” to rebuild the array “1”. You can use the query commands first to verify the device ID and the array ID information before the rebuild command.

rebuild {array_id} {start|stop}

This command allows you to start or stop the rebuilding process on the specified array. After you stopped a rebuilding process, you can resume it at a later time by the rebuild start command.

Examples

HPT CLI> rebuild 1 start

```
HPT CLI > rebuild 1 start
HPT CLI > query arrays
ID      Capacity(GB)  Type  Status  Block  Sector  Cache  Name
-----
1       500.03          RAID1 REBUILDING  --    512B   NONE   RAID1_3
```

This command starts the rebuilding process on the array “1”.

HPT CLI> rebuild 1 stop

```
HPT CLI > rebuild 1 stop
HPT CLI > query arrays
ID      Capacity(GB)  Type  Status  Block  Sector  Cache  Name
-----
1       500.03          RAID1 CRITICAL  --    512B   NONE   RAID1_3
```

This command stops the rebuilding process on the array “1”.

Verify Command

Syntax

verify {array_id} {start|stop}

This command starts or stops the verify process on the specified array.

Examples

HPT CLI> verify 1 start

This command starts to verify the array “1”.

HPT CLI> verify 1 stop

This command stops the verify process on the array “1”.

```

HPT CLI > verify 1 start
HPT CLI > query arrays
ID      Capacity(GB)  Type   Status   Block  Sector  Cache   Name
-----
1        500.03      RAID1  VERIFYING  --    512B    NONE    RAID1_3
HPT CLI > verify 1 stop
HPT CLI > query arrays
ID      Capacity(GB)  Type   Status   Block  Sector  Cache   Name
-----
1        500.03      RAID1  NORMAL    --    512B    NONE    RAID1_3
HPT CLI >

```

Rescan Command

This command will rescan all of the physical devices attached to the RAID controller.

Syntax

rescan

Example

HPT CLI> rescan

```

HPT CLI > unplug 1
HPT CLI > query arrays
ID      Capacity(GB)  Type   Status   Block  Sector  Cache   Name
-----
HPT CLI > rescan
HPT CLI > query arrays
ID      Capacity(GB)  Type   Status   Block  Sector  Cache   Name
-----
1        500.03      RAID1  NORMAL    --    512B    NONE    RAID1

```

Lscard Command

The lscard command is used to list multiple RAID controllers.

Syntax

lscard

Example

```
HPT CLI> lscard
```

```
HPT CLI > lscard
CARD_ID      NAME                                     ACTIVED
-----
0            Controller(1): NVMe                 Active
HPT CLI >
```

Events Commands

The CLI system will automatically record three types of events: Information (shortened to “Inf”), Warning (shortened to “War”), and Error (shortened to “Err”) on the screen output. These commands allow you to query, save, or clear the logged events.

Syntax

```
events | events clear | events save {file_name}
```

events

This command will display a list of all the logged events.

Example

```
HPT CLI> events
```

```
HPT CLI > events
1 Inf [05/11/2020 13:22:45] RAID 0 Array 'RAID_0_0' has been created successfully (Disk 1:WDS100T3X0C-00S7G
, 1/E1/1; Disk 2:Samsung SSD 970 EVO Plus 500GB, 1/E1/2).
2 Inf [05/11/2020 13:22:41] Array 'RAID_1_0' has been deleted successfully.
3 Inf [05/11/2020 13:22:33] RAID 1 Array 'RAID_1_0' has been created successfully (Disk 1:WDS100T3X0C-00S7G
, 1/E1/1; Disk 2:Samsung SSD 970 EVO Plus 500GB, 1/E1/2).
4 Inf [05/11/2020 13:22:28] Array 'RAID1 3' has been deleted successfully.
```

events clear

This command will clear all the logged events.

Example

```
HPT CLI> events clear
```

```
HPT CLI > events clear
The event log has been clear!
```

events save {file_name}

This command will save all the logged events as a plain text file.

Example

```
HPT CLI> events save C:/raidlog.txt
```

```
HPT CLI > events save C:/raidlog.txt  
The event log C:/raidlog.txt has been saved.
```

This command will save all the events to C:/raidlog.txt.

Mail Commands

Syntax

mail recipient

mail recipient add {recipient_name} {mail_address} [Inf|War|Err]

mail recipient delete {recipient_name}

mail recipient test {recipient_name}

mail recipient set {recipient_name} {Inf|War|Err}

mail server

mail server set {server_address} {port} { status } {from_address}

[username] [password]


mail server set {a|p|s|m|u|t} {value}

mail recipient

--- List all of the mail recipients

Example

HPT CLI> mail recipient




ID	Name	Mail Address	Notify Types
1	hpt	yzhang@highpoint-tech.com	Information Warning Error

mail recipient add {recipient_name} {mail_address} [Inf|War|Err]

--- Add a new recipient

Example

HPT CLI> mail recipient add admin admin@somecompany.com Inf War Err

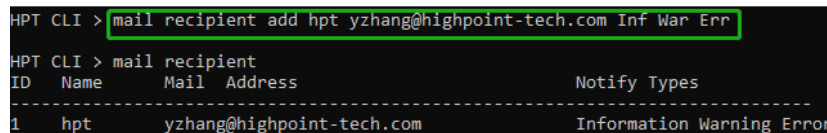

ID	Name	Mail Address	Notify Types
1	hpt	yzhang@highpoint-tech.com	Information Warning Error

This command will setup the RAID system to send mail to admin@somecompany.com for any logged events.

mail recipient delete {recipient_name}

--- Delete an existing recipient.

Example

```
HPT CLI> mail recipient delete hpt
```

```
HPT CLI > mail recipient delete hpt
HPT CLI > mail recipient
ID   Name   Mail Address   Notify Types
-----
HPT CLI >
```

mail recipient test {recipient_name}

--- Send a test email to a specified recipient.

Example

```
HPT CLI> mail recipient test hpt
```

```
HPT CLI > mail recipient test hpt
```

```
HPT CLI >
```

You will receive a test email.

Mon, 11 May 2020 07:52:30 :

This is a test mail.

mail recipient set {recipient_name} {Inf|War|Err}

--- Set the notification type for a recipient.

Example


HPT CLI> mail recipient set admin War Err

mail server

--- display the SMTP server information

Example

HPT CLI> mail server

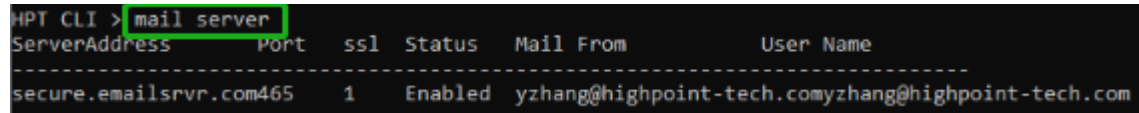

The screenshot shows the output of the 'mail server' command in the HPT CLI. The command 'mail server' is highlighted with a green box. Below it, a table displays the SMTP server configuration. The table has columns: ServerAddress, Port, ssl, Status, Mail From, and User Name. The data row shows: secure.emailsrvr.com465, 1, Enabled, yzhang@highpoint-tech.com, and yzhang@highpoint-tech.com.

ServerAddress	Port	ssl	Status	Mail From	User Name
secure.emailsrvr.com465	1	Enabled	yzhang@highpoint-tech.com	yzhang@highpoint-tech.com	

**mail server set {server_address} {port} {ssl} {status}
{from_address} [username] [password]**

--- Use this command to configure mail server settings.

{server_address} – SMTP server address

{port} – port, generally 25

{ssl} – used ssl, '1' for enable and port need 465, '0' for disable

{status} – status, 'e' for enable or 'd' for disable

{from_address} – mail from address

{username} –mail username

{password} – the user's password

Examples:

HPT CLI> mail server set secure.emailsrvr.com 465 1 e
name@somecompany.com name@somecompany.com password

```
HPT CLI > mail server set secure.emailsrvr.com 465 1 e yzhang@highpoint-tech.com yzhang@highpoint-tech.com
HPT CLI > mail server
ServerAddress      Port    ssl  Status  Mail From      User Name
-----
secure.emailsrvr.com465  1      Enabled yzhang@highpoint-tech.com yzhang@highpoint-tech.com
```

HPT CLI> mail server set mail.somecompany.com 25 0 e
admin@somecompany.com password

```
HPT CLI > mail server set secure.emailsrvr.com 25 0 e yzhang@highpoint-tech.com yzhang@highpoint-tech.com
HPT CLI > mail server
ServerAddress      Port    ssl  Status  Mail From      User Name
-----
secure.emailsrvr.com25  0      Enabled yzhang@highpoint-tech.com yzhang@highpoint-tech.com
```

mail server set {a|p|s|m|u|t} {value}

--- Use this to separate set your mail server value

Parameters

a – SMTP server address

p – port, generally 25

s – status, ‘e’ for enable or ‘d’ for disable

m – mail from address

u – username

t – user’s password

Examples:

HPT CLI> mail server set a smtp.somecompany.com

--- Change the server address

HPT CLI> mail server set p 465

--- Change the port

```
HPT CLI > mail server set p 465

HPT CLI > mail server
ServerAddress  Port  ssl  Status  Mail From  User Name
-----
smtp.163.com   465   0    Enabled yzhang@highpoint-tech.com yzhang@highpoint-tech.com
```

HPT CLI> mail server set s d

--- Disable mail notification

```
HPT CLI > mail server set s d

HPT CLI > mail server
ServerAddress  Port  ssl  Status  Mail From  User Name
-----
smtp.163.com   465   0    Disabled yzhang@highpoint-tech.com yzhang@highpoint-tech.com
```

HPT CLI> mail server set s e

--- Enable mail notification

```
HPT CLI > mail server set s e

HPT CLI > mail server
ServerAddress  Port  ssl  Status  Mail From  User Name
-----
smtp.163.com   465   0    Enabled yzhang@highpoint-tech.com yzhang@highpoint-tech.com
```

Task Commands

When an array requires regular verification or rebuilding, you can use the task commands to automate this process in the background. If you have the appropriate privileges, you can add new tasks, and modify or delete existing tasks.

Syntax

`task`

```
task rebuild {array_id} {name=}
{once|daily|monthly|weekly}={day} interval={interval}
start=mm/dd/yyyy end=mm/dd/yyyy time=hh:mm:ss
```

```
task verify {array_id} {name=} {once|daily|monthly|weekly}={day}
interval={interval} start=mm/dd/yyyy end=mm/dd/yyyy
time=hh:mm:ss
```

```
task delete {task_id}
```

```
task enable {task_id}
```

```
task disable {task_id}
```

task

This command displays detailed information about all scheduled tasks.

Example

```
HPT CLI> task
```

This command displays the current background tasks.

task rebuild

**{array_id}{name=}{once|daily|weekly|monthly={day}
interval={interval} start=mm/dd/yyyy end=mm/dd/yyyy
time=hh:mm:ss**

This command allows you to schedule the frequency as once, daily, weekly or monthly, and the detailed time range to rebuild a specified array. The first mm/dd/yyyy specifies the task start date, while the second mm/dd/yyyy specifies the task end date.

Note:

When you add a task to rebuild a selected array once, the parameter {day} should be omitted.

Examples

HPT CLI> task rebuild 1 name=test once start=5/11/2020
time=17:03:35

```
HPT CLI > task rebuild 1 name=test once start=5/11/2020 time=17:03:35
HPT CLI > task
ID  Name      Start-Date  End-Date    S-F    Description
-----
1   test      05/11/2020  N/A         E-O    Rebuild raid RAID_1_0 (created by )
HPT CLI >
```

This command adds a task schedule named test to rebuild the array “1” at 17:03:35 on 5/11/2020. The rebuild frequency is set to once.

HPT CLI> task rebuild 4 name=myraid4 daily=2 start=2/8/2020
end=2/22/2020 time=13:49:58

This command adds a task schedule named myraid4 to rebuild the array ”4” at 13:49:58 every 2 days from 2/8/2005 to 2/22/2020.

HPT CLI> task rebuild 3 name=myraid3 weekly=2 interval=3
start=2/8/2020 end=2/22/2020 time=13:49:58

This command adds a task schedule named myraid3 to rebuild the array "3" at 13:49:58 on Monday (the 2nd day in a week) every 3 weeks from 2/8/2020 to 2/22/2020.

```
HPT CLI> task rebuild 2 name=myraid2 monthly=3 interval=4  
start=2/8/2020 end=2/8/2020 time=12:30:33
```

This command adds a task schedule named myraid3 to rebuild the array "2" at 12:30:33 on the 3rd day of a month every 4 months from 2/8/2020 to 2/8/2020.

task verify

**{array_id} {name=} {once|daily|weekly|monthly}={day}
interval={interval} start=mm/dd/yyyy end=mm/dd/yyyy
time=hh:mm:ss**

This command allows you to schedule a verify task. The usage of this command is the same as adding a rebuild task schedule.

example

```
HPT CLI> task verify 1 name=test once start=5/11/2020  
time=17:12:33
```

```
HPT CLI > task verify 1 name=test once start=5/11/2020 time=17:12:23
```

ID	Name	Start-Date	End-Date	S-F	Description
1	test	05/11/2020	N/A	E-0	Verify raid RAID_1_0 (created by)

```
HPT CLI >
```

task delete {task_id}

This command allows you to delete a scheduled task. You can query the task ID by task command.

Example

HPT CLI> task delete 1

```
HPT CLI > task
ID   Name   Start-Date   End-Date   S-F   Description
-----
1    test   05/11/2020   N/A        E-O   Verify raid RAID_1_0 (created by )

HPT CLI > task delete 1

HPT CLI > task
ID   Name   Start-Date   End-Date   S-F   Description
-----
HPT CLI >
```

This command will delete the task "1".

task enable {task_id}

This command will enable a disabled task.

Example

HPT CLI> task enable 1

```
HPT CLI > task enable 1

HPT CLI > task
ID   Name   Start-Date   End-Date   S-F   Description
-----
1    test   05/11/2020   N/A        S-F   Verify raid RAID_1_0 (created by )
                  E-O
```

This command will enable the disabled task "1".

task disable {task_id}

This command will disable a scheduled task manually.

Example

HPT CLI> task disable 1

```
HPT CLI > task disable 1
```

ID	Name	Start-Date	End-Date	S-F	Description
1	test	05/11/2020	N/A	D-0	Verify raid RAID_1_0 (created by)

This command will disable the scheduled task”1”.

Set Commands

Syntax

set | set [name]={value}

set

Show the system settable parameters.

```
HPT CLI > set
```

Show the system settable parameters.		
[AR]	Auto Rebuild	Enable
[CE]	Continue Rebuild On Error	Enable
[AA]	Audible Alarm	Enable
[RP]	Rebuild Priority	Medium
[SD]	Spindown Idle Disk (minutes)	Disable
[BP]	Beeper	Enable

- **set AR={y|n}**

Set enable or disable to the [Auto Rebuild] parameter.

Example

HPT CLI> set AR=y

- **set CE={y|n}**

Set enable or disable to the [Continue Rebuilding On Error] parameter.

Example

HPT CLI> set CE=y

- **set AA={y|n}**

Enable or Disable the [Audible Alarm] parameter.

Example

HPT CLI> set AA=y

- **set RP={0-100}**

Change rebuilding priority. If a controller is not specified, this command will set the global rebuilding priority.

Note:

[0-12] Lowest
[13-37] Low
[38-67] Medium
[68-87] High
[>88] Highest

Example

HPT CLI> set RP=50

- **set SD={minutes}**

Set value of [Spindown Idle Disk]

[1-10] 10
[11-20] 20
[21-30] 30
[31-60] 60
[61-120] 120
[121-180] 180
[181-240] 240

Example

HPT CLI> set SD=10

- **set BP={y|n}**

Set enable or disable beeper.

Example

HPT CLI> set BP=y

Help Commands

Syntax

help | help {command}

help

Show generic help about this utility.

Example

HPT CLI> help

```
HPT CLI > help
help [query|create|delete|OCE/ORLM|rebuild|verify|unplug|switch|lscard
rescan|init|events|mail|task|set|clear|help|exit]
```

help {command}

Show help about a specific command.

Example

HPT CLI> help create

```
HPT CLI > help create
Create Command
This command allows you to create a new RAID array or add a spare disk.
Syntax:
create {RAID0|RAID1|RAID3|RAID5|RAID6|RAID10|RAID50|JBOD|spare} [create-options]
create-option:
    disks=1/2,1/3... or disks-*
        Specify the disks used to create array.
    name=array name
        Specify the name of the array which will be created.
    src=source array ID
        If src argument is specified, OCE/ORLM will be started.
    cp=WB, WT or NONE
        Cache Policy option (WB: write back, WT: write through).
    init={foreground|background|keepdata|quickinit}
        Specifies array initialization option.
        foreground:
            Zero out all data on the array. The array is not
            accessible by the operating system until initialization is completed
        background:
            Allow instant access to the array. Parity blocks
            will be generated in background.
        keepdata:
            Setup array information blocks on the drives only.
            Use this option for array recovery.
        quickinit:
            Setup array information blocks and zero out MBR data on the array.
    capacity=array capacity
        Specify the capacity (xxM,xxG) of the target array.
    matrix=n*m
        When create RAID50 to specify the matrix options.
        n: number of subarray's disk, m: number of subarray.
        For example: When create a RAID50 the option matrix
        can be matrix=3*2. That means 2 RAID5s each with 3 disks to form a RAID50
    bs=size
        Specify the block size (16k,32k,64k,128k,256k,512k,1024k)
    sector=size
        Specify the sector size (512B,1k,2k,4k)
```

Exit Command

Syntax

`exit`

Exit from the interactive mode and close the window.

Clear Commands

Syntax

`clear/cls/clr`










This command is used to clear screen.

Troubleshooting

Debugging an Abnormal RAID status

Please submit a support ticket using our online service at
<https://www.highpoint-tech.com/websupport/>

Table 1. WebGUI Icon Guide

	<p>Critical – missing disk</p> <p>A disk is missing from the array bringing it to ‘critical’ status. The array is still accessible but another disk failure could result in data loss.</p>
	<p>Verifying</p> <p>The array is currently running a disk integrity check.</p>
	<p>Rebuilding</p> <p>The array is currently rebuilding meaning you replaced a failed disk or added a new disk to a ‘critical’ state array.</p>
	<p>Critical – rebuild required</p> <p>The array has all disks, but one disk requires rebuilding.</p>
	<p>Disabled</p> <p>The icon represents a disabled array, meaning more than one disk failed and the array is no longer accessible</p>
	<p>Initializing</p> <p>The array is initializing. The two types of initialization are Foreground and Background. (See Initialization)</p>
	<p>Uninitialized</p> <p>The array initialization process has been interrupted, and the process is incomplete.</p>
	<p>Not Initialized</p> <p>Disk is not initialized yet, and needs to be initialized before use</p>
	<p>Legacy</p> <p>An existing file system has been detected on the disk. These disks are classified as legacy drives.</p>









	<p>Normal</p> <p>The array status is normal</p>
	<p>Initializing</p> <p>The array is initializing, either foreground or background initialization</p>
	<p>Initialization Stopped</p> <p>The initialization has been stopped. Current status is uninitialized.</p>
	<p>Critical – Inconsistency</p> <p>Data in the array is inconsistent and needs to be rebuilt.</p>
	<p>Critical – missing disk</p> <p>A disk has been removed or experienced failure, and user needs to reinsert disk or add a new disk.</p>
	<p>Rebuilding</p> <p>The array is currently rebuilding.</p>
	<p>Verifying</p> <p>The array is performing a data consistency check. Array status will show ‘verifying’.</p>
	<p>Disabled</p> <p>The array does not have enough disks to maintain the RAID level. A disabled array is not accessible.</p>

Table 2. RAID Level Reference Guide

Type	Description	Min. disks	Usable space	Advantage	Disadvantage	Application
RAID 0	Disk Striping	4	100%	Offers the highest performance	No fault tolerance - failure of one drive results in complete data loss	Temporary file, performance driven application.
RAID 1	Disk Mirroring	2	50%	Provides convenient low-cost data redundancy for smaller systems and servers	Useable storage space is 50% of total available capacity. Can handle 1 disk failure.	Operating system, backup, and transaction database.
RAID10	Striping with Mirroring	4	50%	High read performance and medium write performance with data protection for up to 2-drive failures	Useable storage capacity equals total capacity of all drives in the array minus two	Fast database and application servers which need performance and data protection

HighPoint Recommended List of NVMe SSDs and Motherboards

HighPoint maintains a list of NVMe SSD's and motherboards suitable for use with the

SSD7101A/SSD7103/SSD7202/SSD7204/SSD7104/SSD7184/SSD7180/SSD6540/SSD6540M. This document is routinely updated, and is available from the SSD7101A/SSD7103/SSD7202/

SSD7204/SSD7120/SSD7184/SSD7180/SSD7104/SSD6540/SSD6540M Resources webpage:

SSD7101A:

https://highpoint-tech.com/PDF/Compatibility_List/SSD7101A_Compatibility_List.pdf

SSD7103:

https://highpoint-tech.com/PDF/Compatibility_List/SSD7103_Compatibility_List.pdf

SSD7202:

http://www.highpoint-tech.com/PDF/Compatibility_List/SSD7202_Compatibility_List.pdf

SSD7204:

http://www.highpoint-tech.com/PDF/Compatibility_List/SSD7204_Compatibility_List.pdf

SSD6540:

https://www.highpoint-tech.com/PDF/Compatibility_List/SSD6540_Compatibility_List.pdf

SSD6540M:

[https://highpoint-tech.com/PDF/Compatibility_List/SSD6540M_Compatibility_List.p
df](https://highpoint-tech.com/PDF/Compatibility_List/SSD6540M_Compatibility_List.pdf)

SSD7120:

https://www.highpoint-tech.com/PDF/Compatibility_List/SSD7120_Compatibility_List.pdf

SSD7184:

https://www.highpoint-tech.com/PDF/Compatibility_List/SSD7184_Compatibility_List.pdf

SSD7180:

https://www.highpoint-tech.com/PDF/Compatibility_List/SSD7180_Compatibility_List.pdf

Contacting Technical Support

FAQ's, technical articles, and trouble-shooting tips are available from our Support web page

https://highpoint-tech.com/USA_new/support.htm

If you require technical Support, please submit a support ticket using our online service at <https://www.highpoint-tech.com/websupport/>.